

## 1152 Anti-Friction Caster Series

QPU (Brown Flat) Wheel Diameter x Wheel Width 100 x 50mm


EAN

KS-11520400641021

Rigid Caster, Welded Caster Fork - 85x70 Bolt Hole Spacing  
 Blue painted finish, Mounting Type - Top Plate  
 Cast Iron core, High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearing - Ball Bearing.

Wheel Tread: High-Quality Polyurethane  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

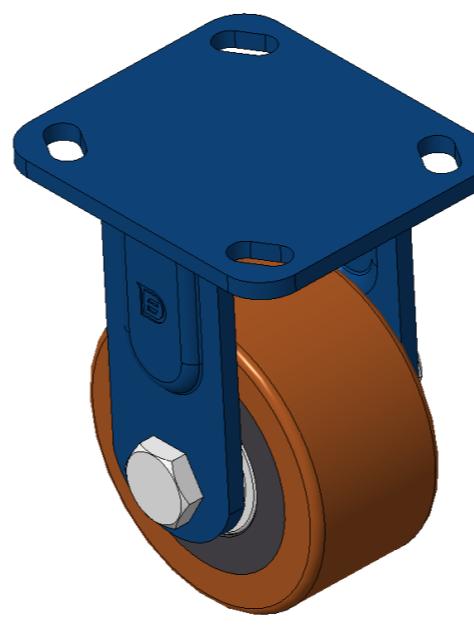

Picture may differ from original product

## Technical Data


 Imperial  Metric

Wheel Diameter	4 "
Wheel Width	2 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Overall Height	5-15/16 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	1102lbs
Load Capacity (Static)	1653lbs
Temperature	-4°F to +158°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.7lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

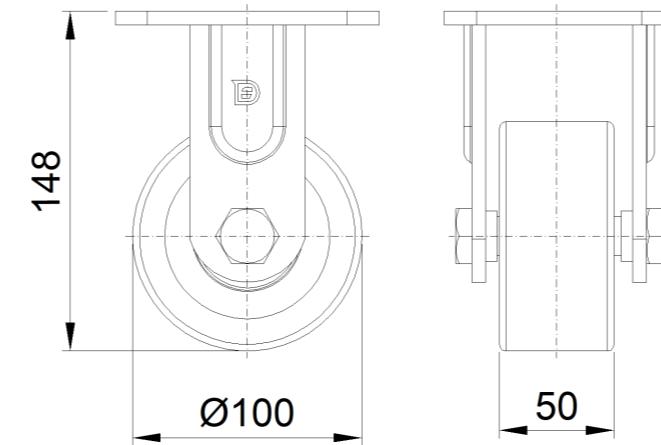

## Mounting

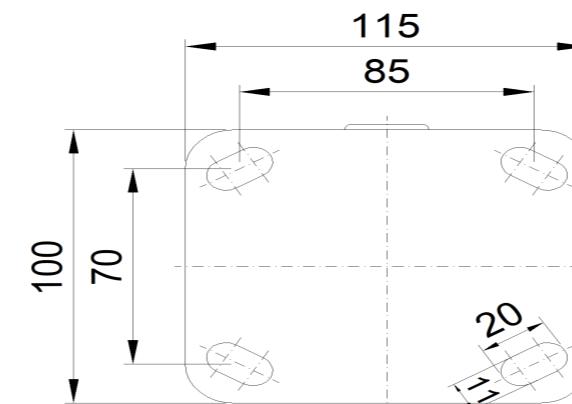

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com