



1152 Anti-Friction Caster (B Type) Series

QPU (Brown flat) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11520600532061

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 129.4 x 73.8 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

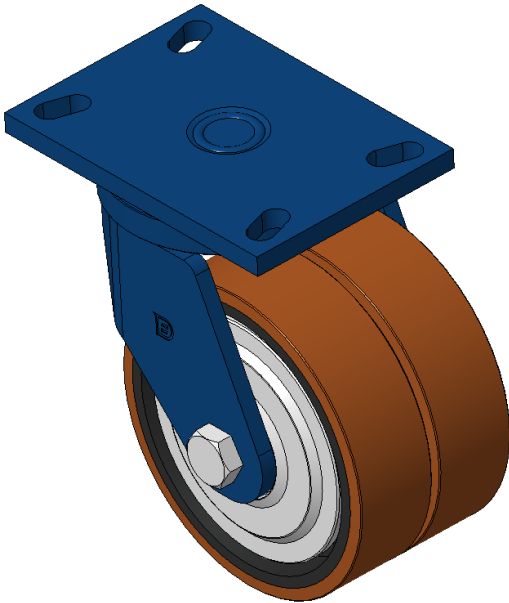

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	87mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	114 x 159mm
Bolt Hole Spacing	129.4 x 73.8mm
Plate Hole	13 x 25.5mm
Offset	48mm
Swivel Interference	260mm
Overall Height	191mm
Swivel Radius	130mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	1080kgs
Load Capacity (Static)	1620kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	7.5kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

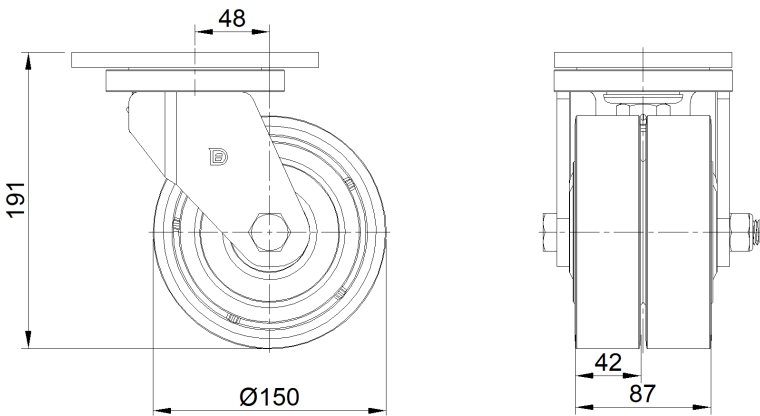

Mounting

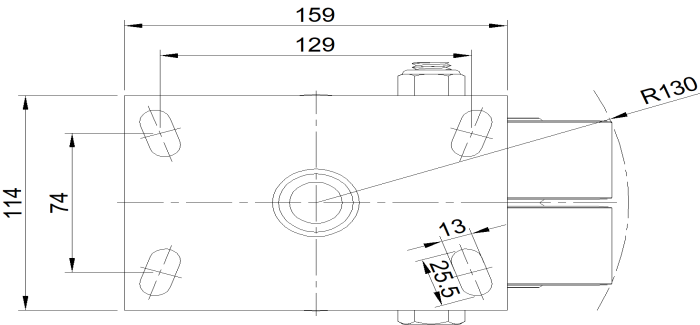

* For any deviation between metric and imperial spec, please refer to the metric spec.