1152 Anti-Friction Caster Series

MC Nylon (beige) Wheel Diameter x Wheel Width 200 x 65mm

EAN

KS-11520800074021

Rear brake Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Reinforced Polypropylene, natural Wheel Tread Bearing - Ball Bearing

Wheel surface: Thermoplastic plastic (PA6) Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 65mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 62mm 328mm Swivel Interference Overall Height 255mm **Swivel Radius** 164mm Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 1350kgs

Load Capacity (Dynamic) 1350kgs

Load Capacity (Static) 2025kgs

Temperature -20°C to

Temperature -20°C to +80°C

Fork Type Swivel Caster With Rear Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight8.85kgsStandardISO22883

Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

• • • •

Dimensions

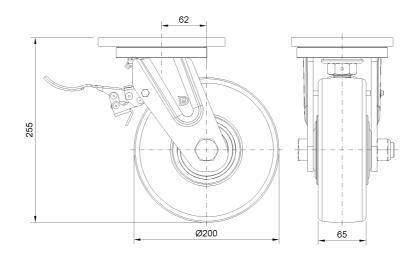

Mounting

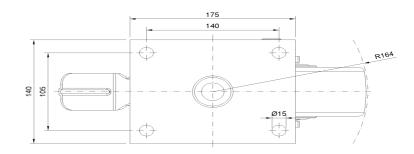

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.