




1152 Self-Align Casters Series

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11520800532741

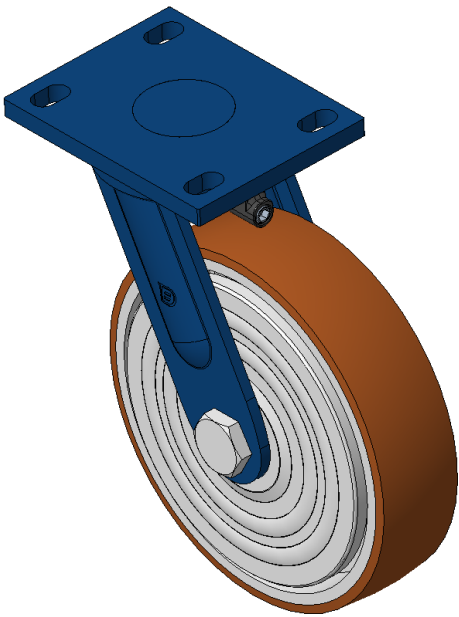

Picture may differ from original product

Self-resetting castors, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 110x75 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing

Wheel tread: High quality polyurethane wheel tread  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 200mm                     |
| Wheel Width                                                            | 50mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 140 x 110mm               |
| Bolt Hole Spacing                                                      | 110x75mm                  |
| Plate Hole                                                             | 22 x 13mm                 |
| Offset                                                                 | 62mm                      |
| Swivel Interference                                                    | 328mm                     |
| Overall Height                                                         | 248mm                     |
| Swivel Radius                                                          | 164mm                     |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 670kgs                    |
| Load Capacity (Static)                                                 | 1005kgs                   |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 6.07kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

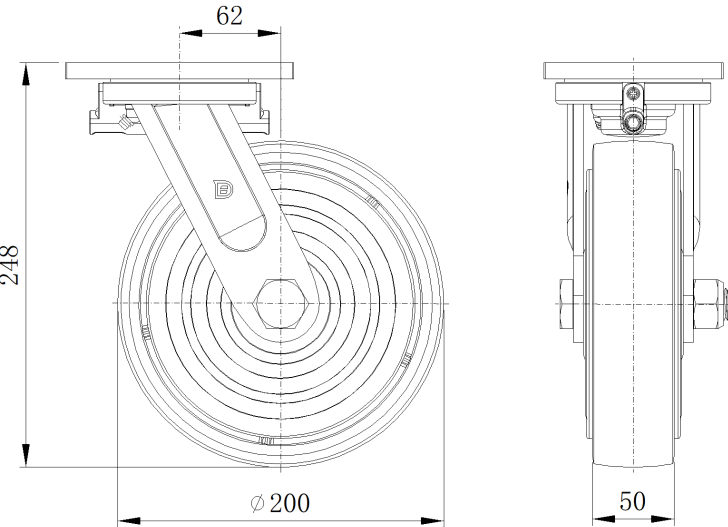

Mounting

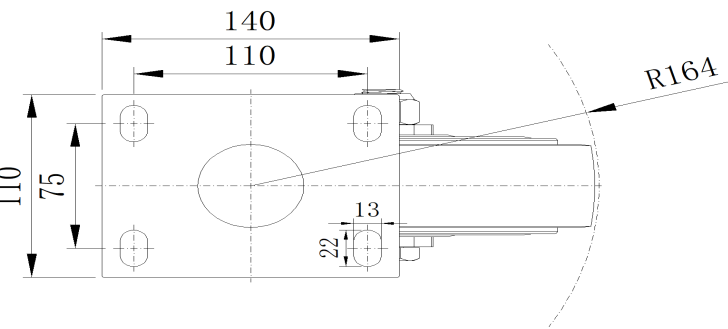

\* For any deviation between metric and imperial spec, please refer to the metric spec.