


## 1155 STAT Series Caster Series (All Plastic)

Resolute (blue gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-11550400451073

Rigid Casters with a high-grade Fork and a polyamide-reinforced Fork. Rust- and Corrosion resistant, Reinforced, and suitable for Light and Medium Duty trolleys. High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread. Dark gray color, Bearing—Ball Bearing.

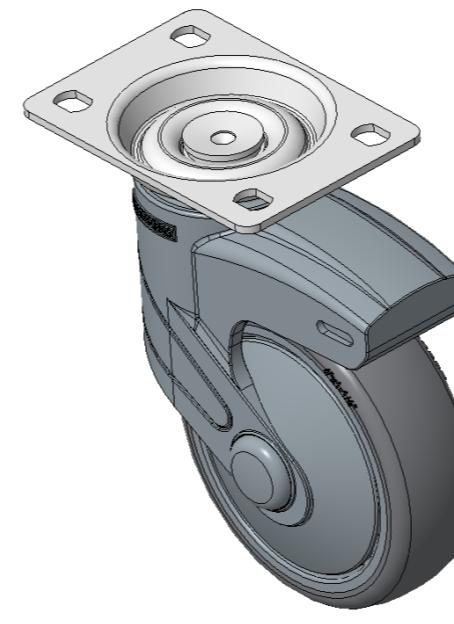

Picture may differ from original product

Drawings are for reference only and may differ from the product

## Technical Data

 Imperial  Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-7/8 " x 2-3/4 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 3/8 " x 3/8 "

Overall Height 5-5/8 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 1.4lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

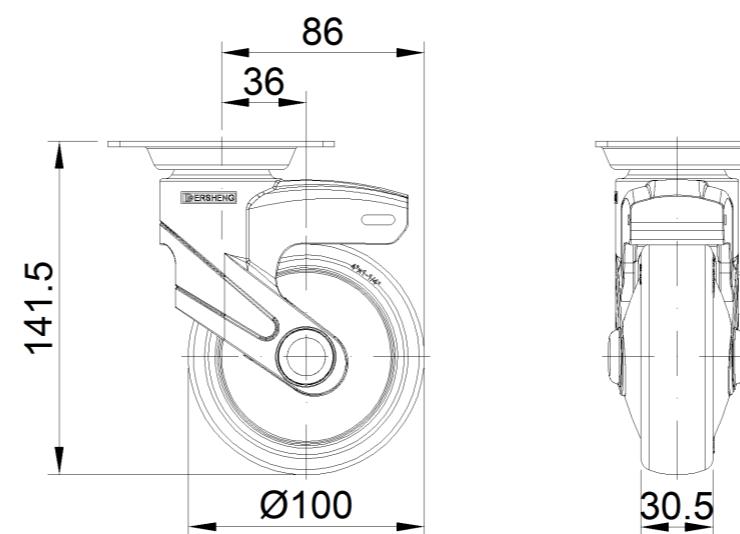

## Mounting

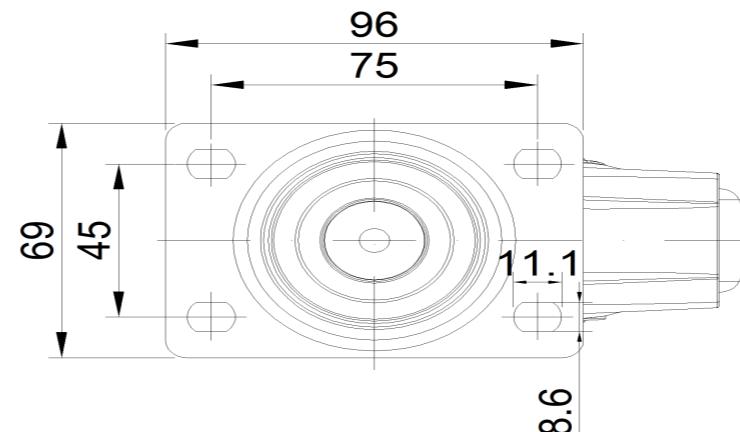

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com