## 1155 STAT Series Caster Series (All Plastic)

PPR (Blue Grey Dark Grey Plain Bearing Hub Lenth37) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11550502266583


Long double-brake type, With locking system Casters, Threaded Stem M12x25
Blue-gray legs made of polyamide reinforcement, Threaded Stem installation
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Plain Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "
Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12

Threaded Length 1"

Offset 1-1/2"

Swivel Interference 9"

Overall Height 6-1/2"

Swivel Radius 4-1/2"

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.6lbs

Standard ISO22881

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

## Dimensions



Mounting

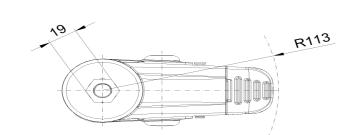

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.