

## 1157 57 Series Caster Series

EQPU (Brown round) Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11570500552031

Swivel Caster with Welded Caster Fork, red painted finish  
 Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
 Bearing - Ball Bearing

Wheel tread: Made of high-quality polyurethane  
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	42mm
Swivel Interference	214mm
Overall Height	170mm
Swivel Radius	107mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	450kgs
Load Capacity (Static)	675kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.59kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

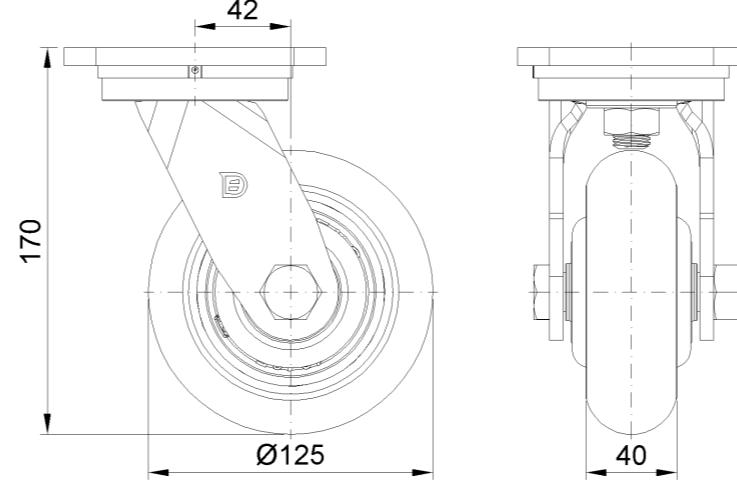

## Mounting

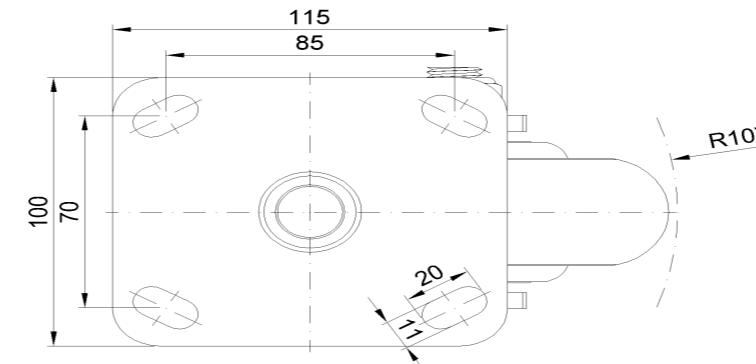

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com