

1157 57 Series Caster Series

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11570600541141

Rigid castors, Welded Caster Fork Surface sprayed with red paint, Top Plate installation device, Hole spacing 110x75 Wheel core made of cast iron, high quality polyurethane Wheel Tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

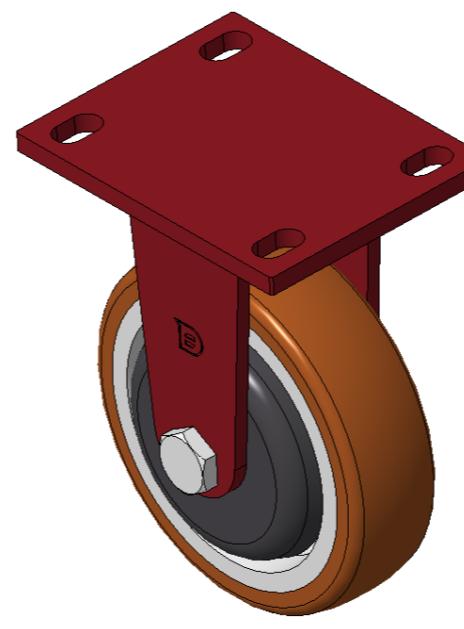

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 150mm |
| Wheel Width | 42mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 140 x 110mm |
| Bolt Hole Spacing | 110x75mm |
| Plate Hole | 22 x 13mm |
| Overall Height | 197mm |
| Hardness Of Tread | 94±5° Shore A |
| Load Capacity (Dynamic) | 670kgs |
| Load Capacity (Static) | 1005kgs |
| Temperature | -20°C to +80°C |
| Fork Type | Rigid Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 3.81kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | • • • • ○ |
| Operating Noise | • • • • • |
| Floor Surface Preservation | • • • • • |

Dimensions

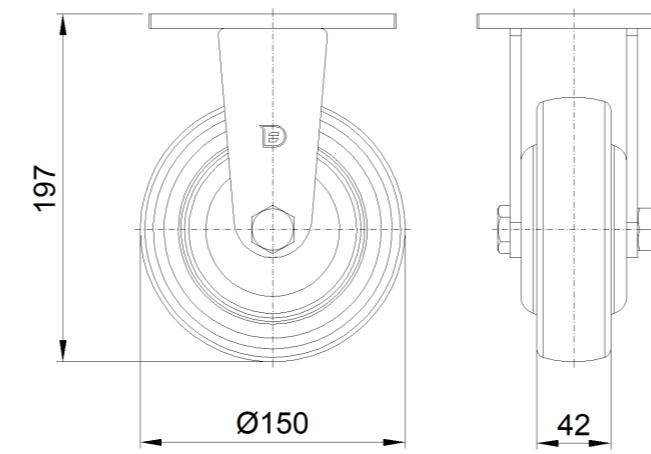

Mounting

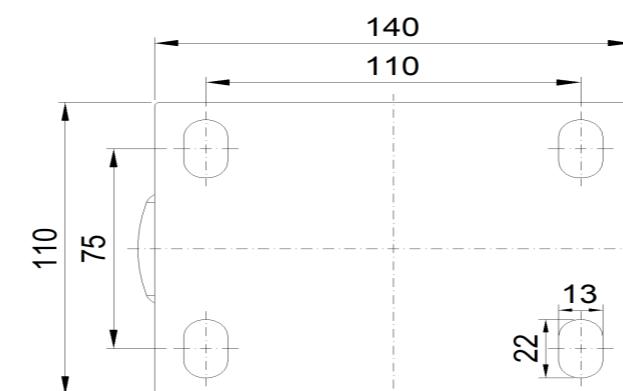

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com