


1162 Super Heavy Duty Casters Series (Single Wheel)

VQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11620800542011

Portable Casters, Welded Caster Fork, blue paint finish.
 Base plate Mounting Type device, 140x105mm Bolt Hole Spacing.
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown.
 Bearing—skew ball bearing.

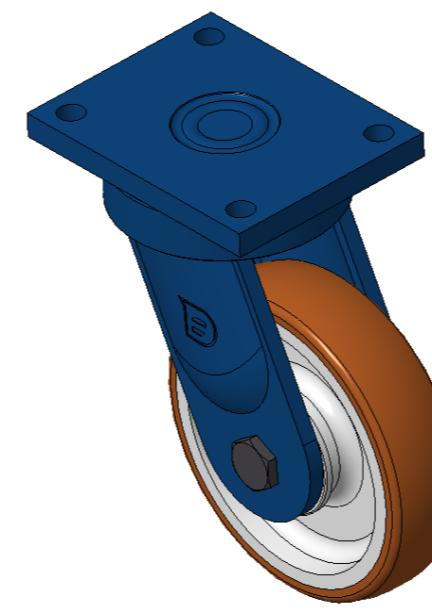

Wheel Tread: High-Quality Polyurethane
 Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 200mm

Wheel Width 50mm

Wheel Bearing Wheel With Taper Roller Bearings

Plate Size 175 x 140mm

Bolt Hole Spacing 140x105mm

Plate Hole 17mm

Offset 62mm

Swivel Interference 326mm

Overall Height 280mm

Swivel Radius 163mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1000kgs

Load Capacity (Static) 1500kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 14.52kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

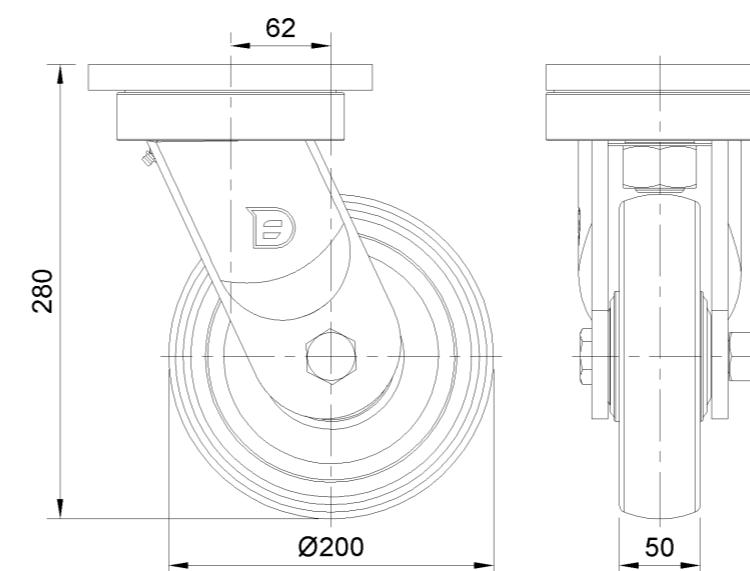

Mounting

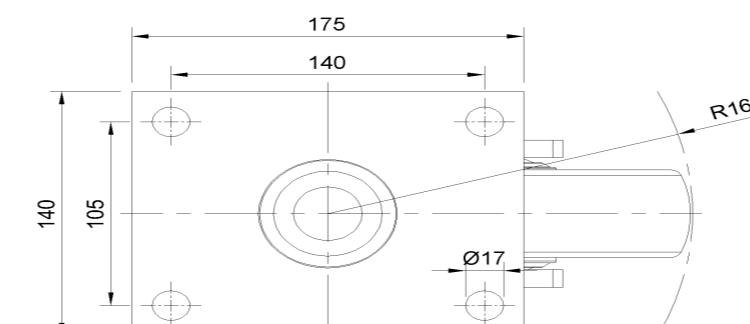

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com