


## 1162 Super Heavy Duty Casters Series (Single Wheel)

VQPU (brown flat) Wheel Diameter x Wheel Width 250 x 80mm

EAN

KS-11621000541111

Rigid Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 210x160 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron Bearing - Taper Roller Bearing

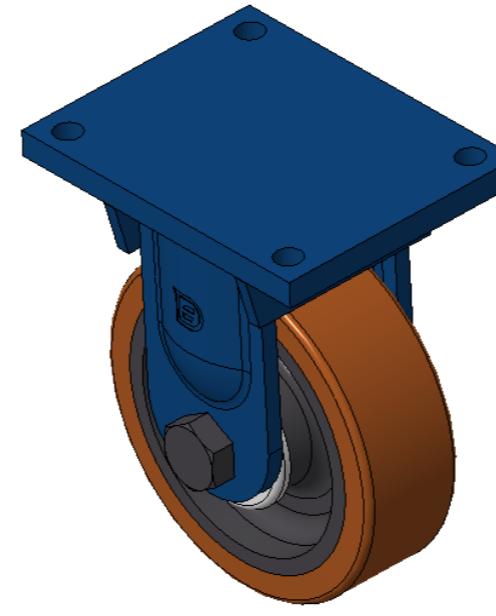

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter 10 "

Wheel Width 3-1/8 "

Wheel Bearing Wheel With Taper Roller Bearings

Plate Size 10-1/16 " x 8 "

Bolt Hole Spacing 8-17/64 " x 6-19/64 "

Plate Hole 7/8 "

Overall Height 13 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 4409lbs

Load Capacity (Static) 6614lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 54.3lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

## Dimensions

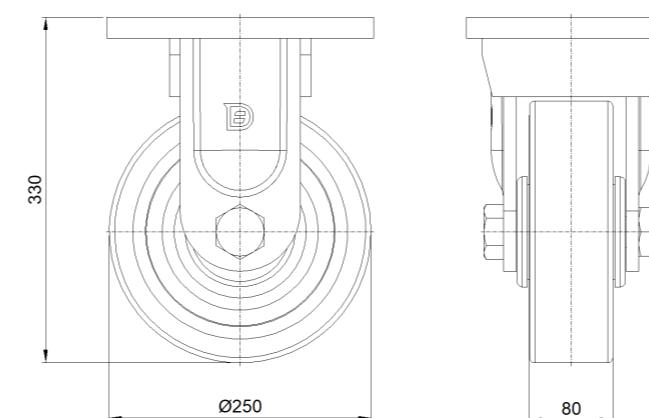

## Mounting

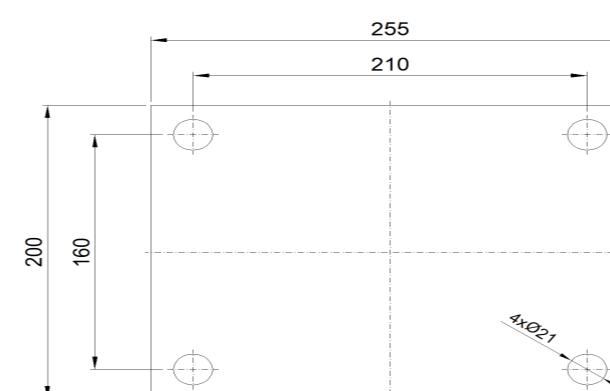

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com