

1162 Super Heavy Duty Casters Series (Single Wheel)

VXPU (burgundy flat) Wheel Diameter x Wheel Width 300 x 90mm

EAN


KS-11621200691111

Rigid Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 210x160 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron burgundy Bearing - Taper Roller Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

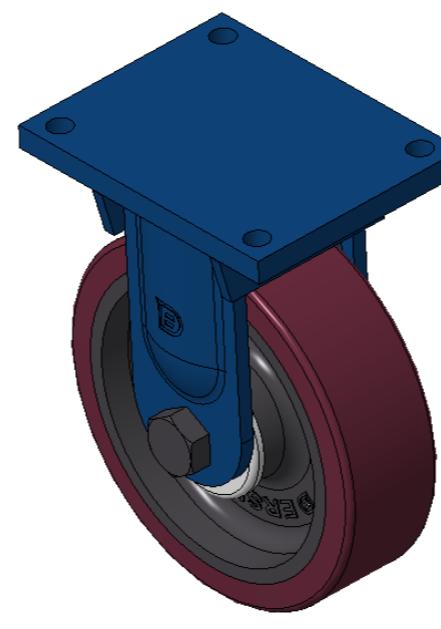

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 11-13/16 "

Wheel Width 3-9/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 10-1/16 " x 8 "

Bolt Hole Spacing 8-17/64 " x 6-19/64 "

Plate Hole 7/8 "

Overall Height <div style="

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 5952lbs

Load Capacity (Static) 8929lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 72.4lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

Dimensions

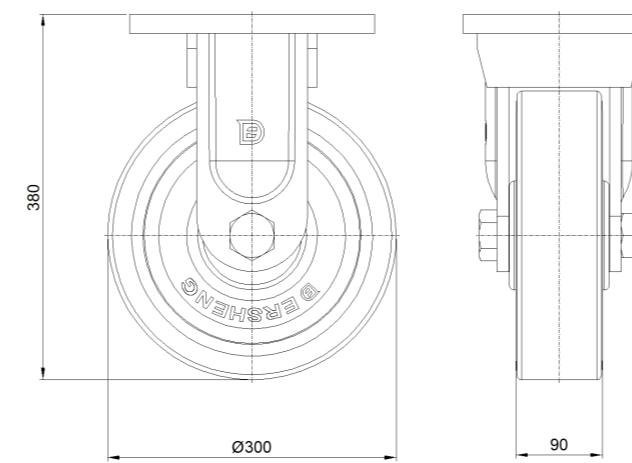

Mounting

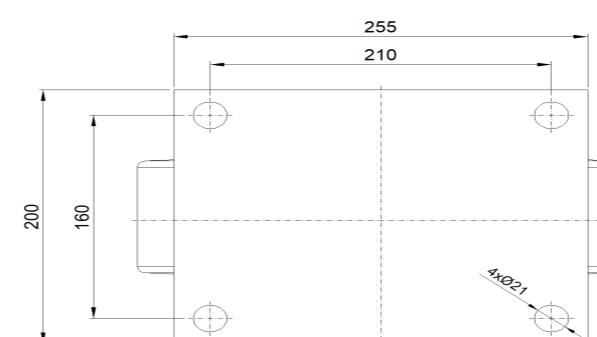

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com