


1162D Super Heavy Duty Casters Series (Double Wheel)

VXPU (burgundy flat) Wheel Diameter x Wheel Width 300 x 90mm

EAN

KS-11621200692321

Swivel Caster with Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 210x160 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron burgundy Bearing: Taper Roller Bearing

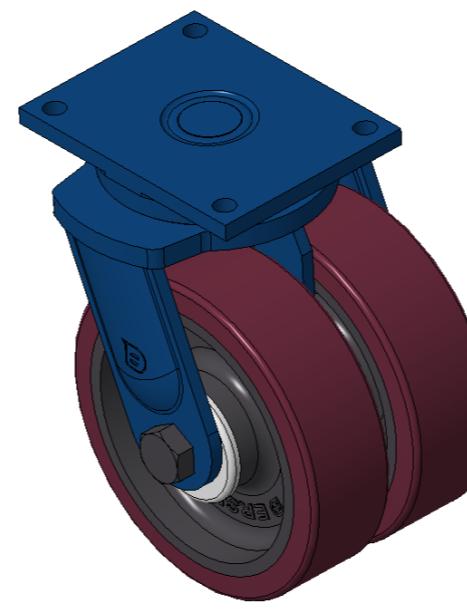

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 11-13/16 "

Wheel Width 8-1/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 10-1/16 " x 8 "

Bolt Hole Spacing 8-17/64 " x 6-19/64 "

Plate Hole 7/8 "

Offset 3 "

Swivel Interference 19-1/2 "

Overall Height 15-23/64 "

Swivel Radius 9-15/16 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 10803lbs

Load Capacity (Static) 16204lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 134.5lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

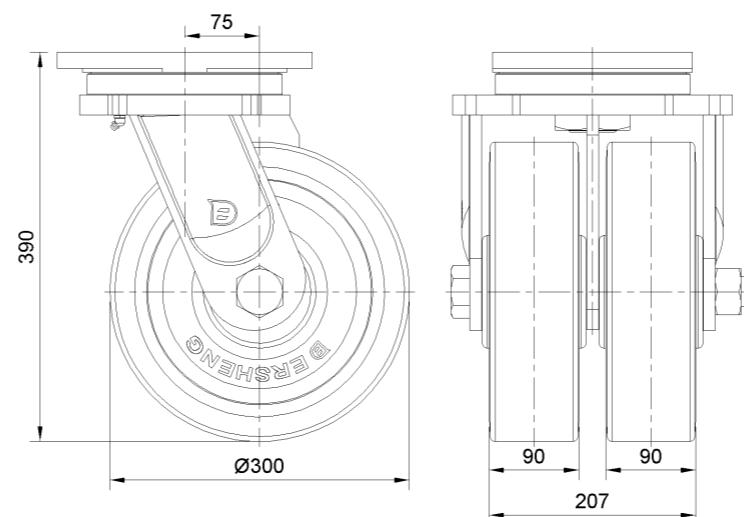

Mounting

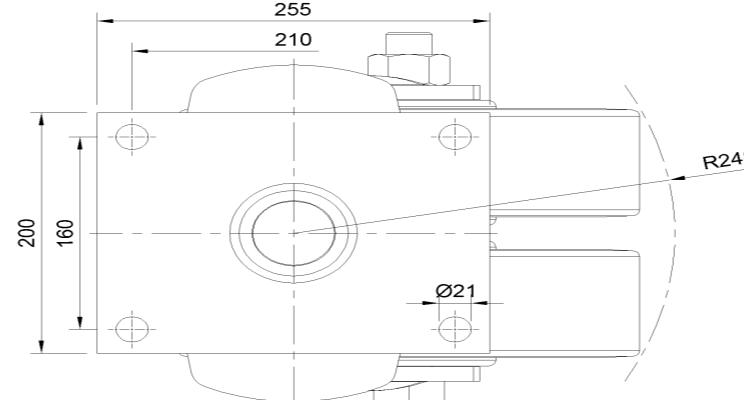

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com