## 1165-4 1165 Series — AMR/AGV-4 Single Precision Ball Bearing Caster (Medium Duty)Series



W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

KS-11650504452423

Swivel Caster, Welded Caster Fork, electroplated finish

Mounting Type - Top Plate, 80x60 Bolt Hole Spacing
Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread

Cast Iron dark gray, Bearing—Ball Bearings

Wheel surface: Thermoplastic elastomer (TPR) wheel surface

Wheel Center: Polypropylene wheel core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

5 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

4-1/16" x 3" Plate Size 3-3/16" x 2-7/16" **Bolt Hole Spacing** 1/2 " x 23/64 " Plate Hole 1-1/2 "

Offset Swivel Interference 6" Overall Height 4 " Swivel Radius

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 220lbs Load Capacity (Static) 331lbs Temperature -4°F to +140°F **Swivel Caster** Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 5.5lbs Standard ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

## Dimensions

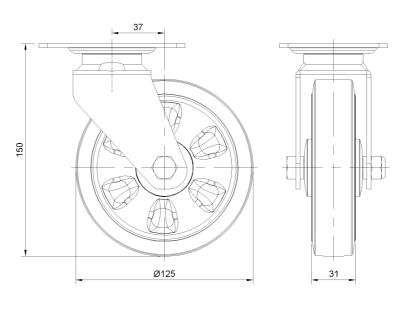



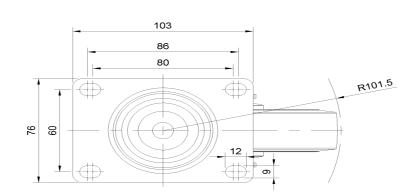

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.