

## WMRC Series




WMRC (Transparent) Wheel Diameter x Wheel Width 100 x 31mm

EAN

KS-1202070413W173

Impact Resistance, Non-Marking, Not Be Dyed, Corrosion resistant, very Great Abrasion Resistance, Odorless Resistant to many chemicals, Heavy Load, very low Rolling Resistance Color: Natural, with Dust Cap

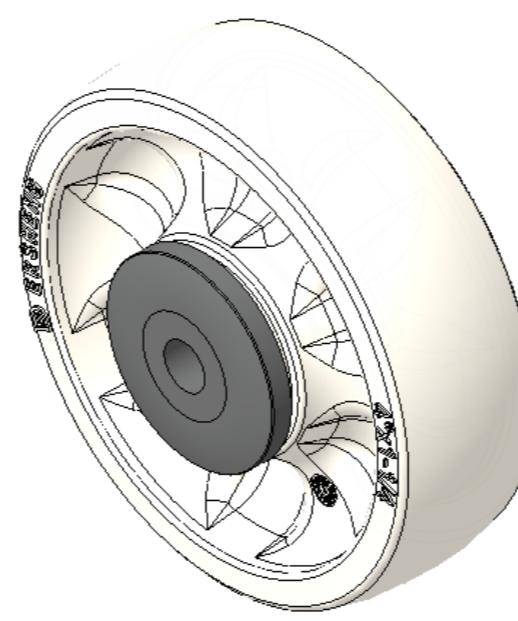

Wheel Tread: Thermoplastic (PA6)  
 Wheel Center: Thermoplastic (PA6)  
 Bearing: precision ball

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter(D)	4 "
Wheel Width(T2)	1-1/4 "
Wheel Bearing	Ball Bearing
Axle Bore(d)	3/8 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Length(T1)	1-11/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	353lbs
Load Capacity (Static)	529lbs
Temperature	-4°F to +176°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.4lbs
Standard	ISO22883

## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

## 2D Dimensional Drawing of Single Wheel

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com