

MRC Series

MRC (Black) Wheel Diameter x Wheel Width 100x36mm

D

KS-12020704153180

Impact resistant, scratch-resistant, Not Be Dyed, corrosion resistant, highly abrasion resistant, Odorless. Resistant to many chemical corrosions, Heavy Load, very low Rolling Resistance. Color: Black, with Dust Cap.



Wheel Tread: Thermoplastic (PA6)

Outer packaging: Thermoplastic (PA6)

Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter(D) 4 "

Wheel Width(T2) 1-7/16 "

Wheel Bearing Ball Bearing

Axe Bore(d) 3/8 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 2 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 331lbs

Load Capacity (Static) 496lbs

Temperature -4°F to +176°F

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.4lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

2D Dimensional Drawing of Single Wheel

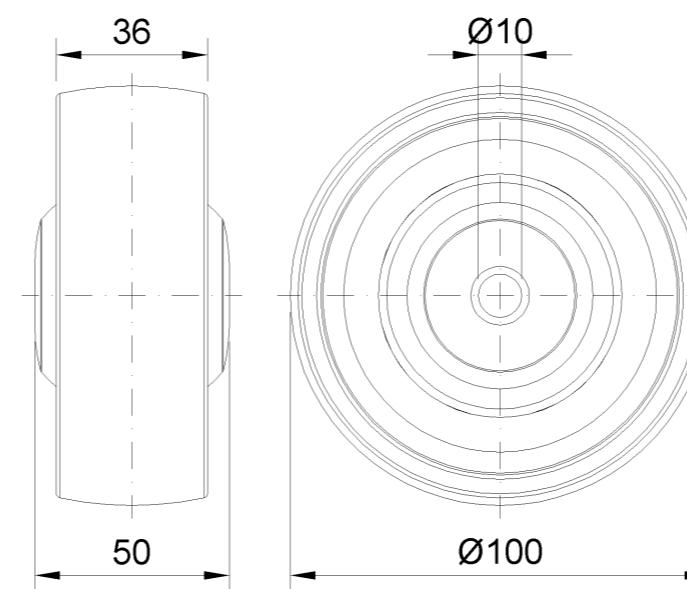

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com