

## Blue Resilient Resolute Rubber Wheel Series



Full-Effect Elastic Wheel (Black &amp; Blue) Wheel Diameter x Wheel Width 200x48mm

EAN

KS-12024508191172

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
 Color: Black/Blue, includes bearing and tubing.



Wheel core: High-quality impact-resistant polypropylene  
 Wheel tread: Thermoplastic rubber elastomer (TPR)  
 Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter(D) 200mm

Wheel Width(T2) 48mm

Wheel Bearing Annular Ball Bearing

Axle Bore(d) 12.2mm

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 55mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 325kgs

Load Capacity (Static) 487.5kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.00kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •

Operating Noise • • • •

Floor Surface Preservation • • • •

## 2D Dimensional Drawing of Single Wheel

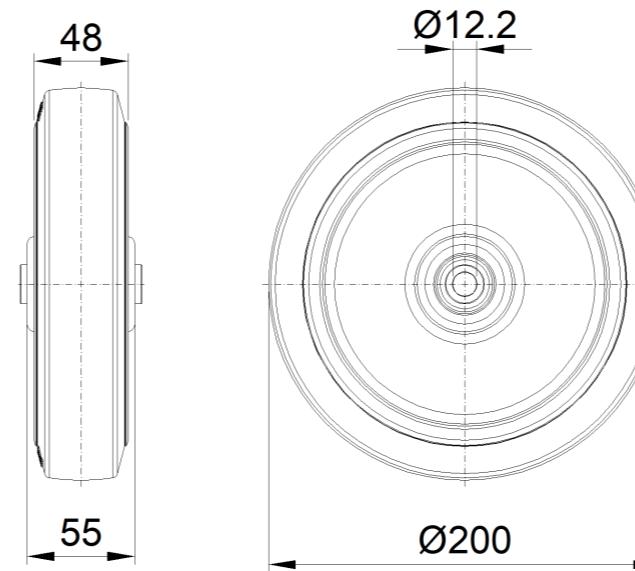

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com