

1109-HD American Mechanical Wheel Series



QPU (blue round) Wheel Diameter × Wheel Width 75 × 45mm

EAN


TW-110903002A011

Portable Casters, Riveted and Stamping Top Plate; Zine-Plated Top Plate, electroplated Top Plate, Mounting Type - Top Plate device; cast iron Wheel Center, High Quality Polyurethane Wheel Tread; blue color, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane

Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

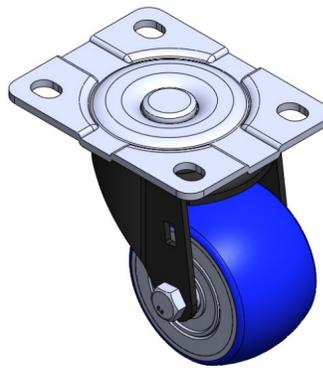

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	110 x 86mm
Bolt Hole Spacing	83 x 60mm
Plate Hole	14 x 11mm
Offset	31mm
Swivel Interference	137mm
Overall Height	107mm
Swivel Radius	68.5mm
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	450kgs
Load Capacity (Static)	675kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.40kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

Dimensions

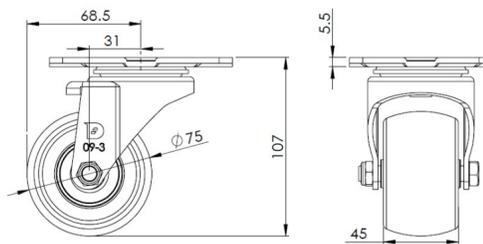

Mounting

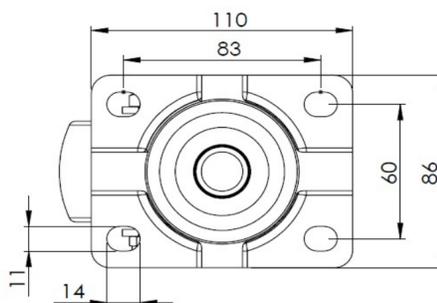

* For any deviation between metric and imperial spec, please refer to the metric spec.