


## 1102 B Type Caster Series

EQPU (blue) Wheel Diameter x Wheel Width 125 x 40 mm

EAN

TW-4110205004052 KS-11020500554061

Casters equipped with a rear brake With locking system, Welded Caster Fork. Blue painted finish, Mounting Type - Top Plate, 110x75mm Bolt Hole Spacing. Cast Iron wheel center, High-Quality, high-elasticity rubber Wheel Tread, Cast Iron blue. Bearings—Ball Bearings, with specially designed anti-winding wheel covers.

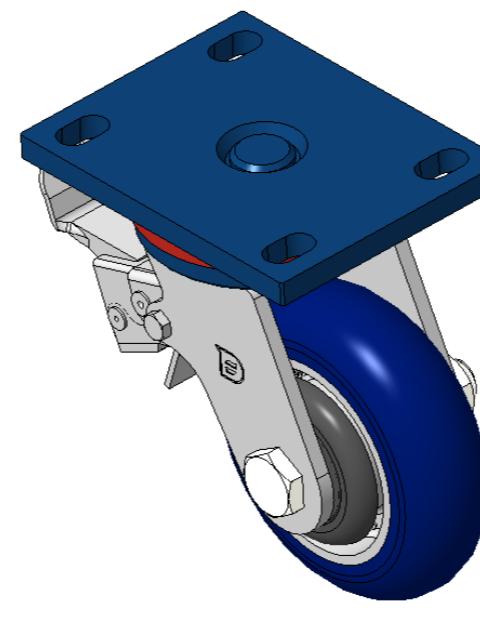

Wheel surface: Made of high-quality, high-elasticity rubber

Wheel hub: Iron wheel hub

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 125mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 22 x 13mm

Offset 42mm

Swivel Interference 214mm

Overall Height 170mm

Swivel Radius 107mm

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.35kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

## Dimensions

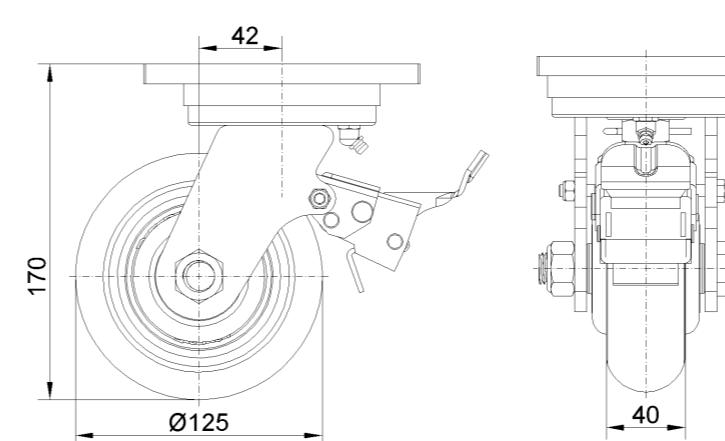

## Mounting

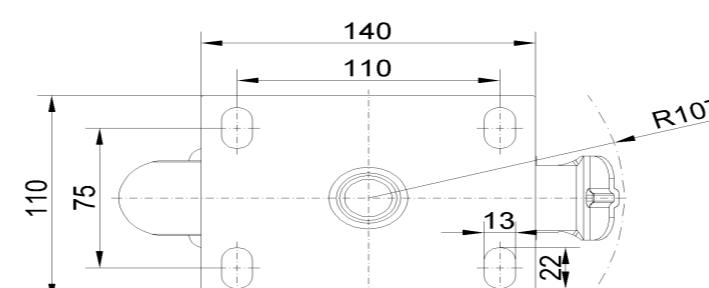

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com