


1106 Medical Caster Series

NPPR Wheel Diameter x Wheel Width 75 x 27mm

EAN

TW-4110603002012

Swivel Caster, Riveted Stamping Fork - 3/8" - 16 UNC
 Zinc-Plated, Mounting Type - Threaded Stem
 High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
 Rubber (TPR) Wheel Tread
 Dark gray, Bearing - Ball Bearing

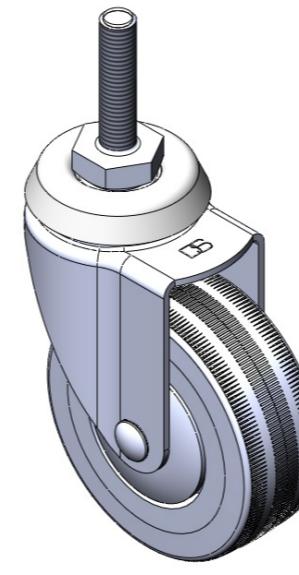

Wheel tread: Thermoplastic rubber elastomer (TPR)
 Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	75mm
Wheel Width	27mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8" -16牙
Threaded Size	40mm
Offset	24mm
Swivel Interference	122mm
Overall Height	110mm
Swivel Radius	61mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.50kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

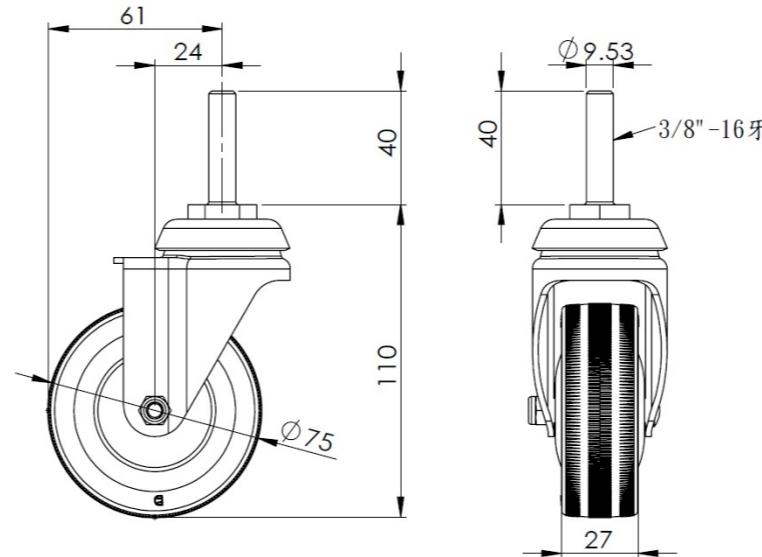

Mounting

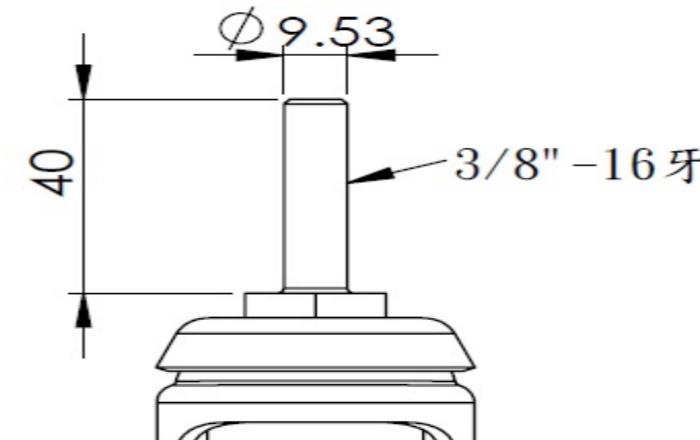

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com