


1109 Medium Duty/Low Profile Business Machine Caster Series

PP Wheel Diameter x Wheel Width 62.5 x 26mm

EAN

TW-4110902052012

Swivel Caster with Riveted, Stamping Fork—M12-P1.75 Zinc-Plated, Mounting Type - Top Plate Polypropylene core and Wheel Tread Black, Plain Bearing.

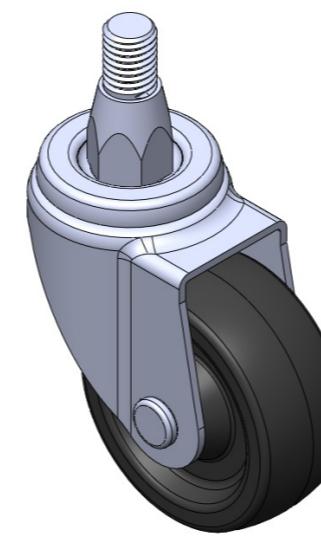

Wheel tread: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	62.5mm
Wheel Width	26mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M12-P1.75
Threaded Size	16mm
Offset	26mm
Swivel Interference	114mm
Overall Height	101mm
Swivel Radius	57mm
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	140kgs
Load Capacity (Static)	210kgs
Temperature	-10°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.50kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • ○ ○
Floor Surface Preservation	• • • ○ ○

Dimensions

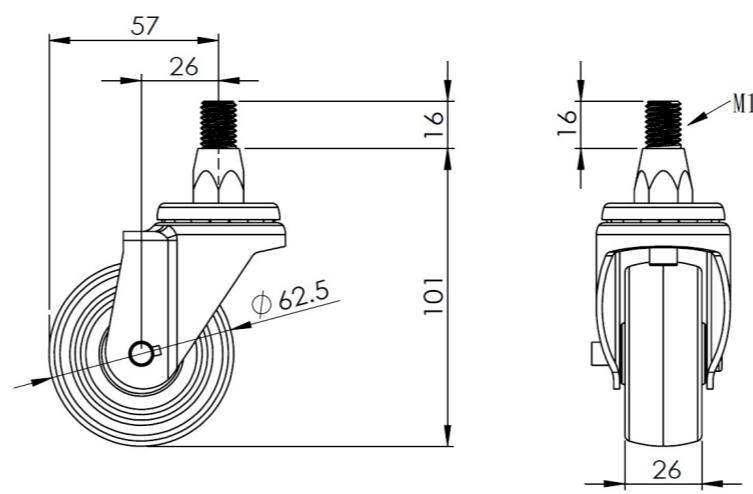

Mounting

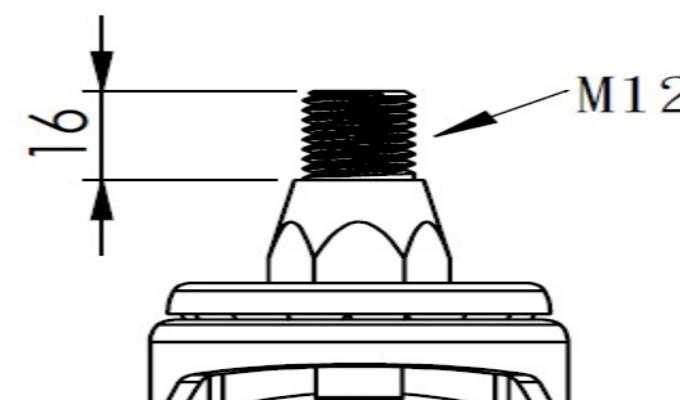

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com