

1109 Medium Duty/Low Profile Business Machine Caster Series

Nylon Wheel Diameter x Wheel Width 63 x 45mm


EAN

TW-4110902052016

Swivel Caster, Riveted Stamping Fork - 3/8-16 threads
 Zinc-Plated, Mounting Type - Threaded Stem
 Reinforced Polypropylene core and Wheel Tread
 Bearing - Ball Bearing

Wheel surface: Thermoplastic
 Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

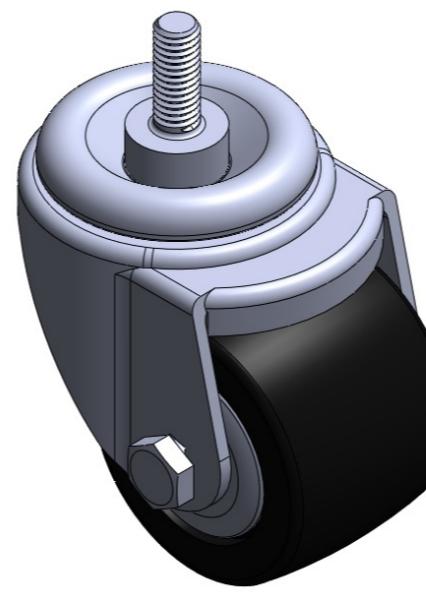

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	63mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8" -16牙
Threaded Size	25mm
Offset	27mm
Swivel Interference	116mm
Overall Height	88mm
Swivel Radius	58mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	375kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.5kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

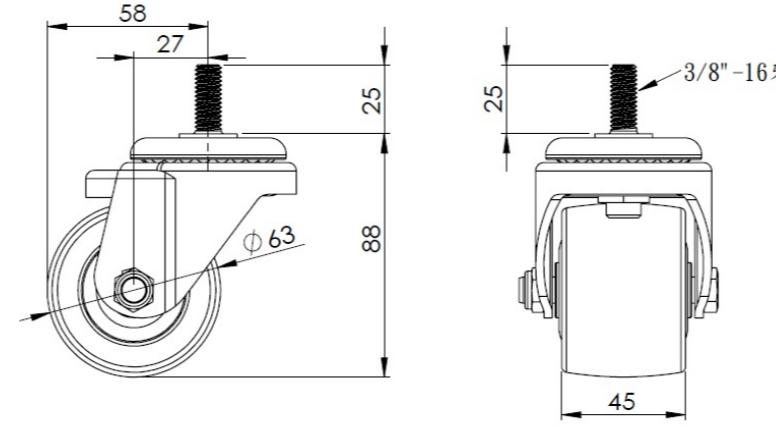

Mounting

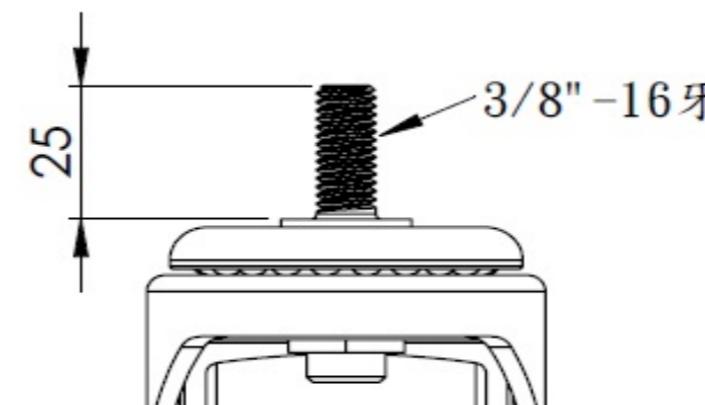

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com