

1109 Medium Duty/Low Profile Business Machine Caster Series

Phenolic Wheel Diameter x Wheel Width 75 x 45mm


EAN

TW-4110903002013

Swivel Caster, Riveted Stamping Fork with 3/8"-16 thread.
 Zinc-Plated, Mounting Type - Top Plate.
 Phenolic Wheel.
 Bearings—Annual Ball Bearings.

Tread: Compressed synthetic resin impregnated with fabric
 Wheel Center: Compressed synthetic resin impregnated with fabric

Drawings are for reference only and may differ from the product

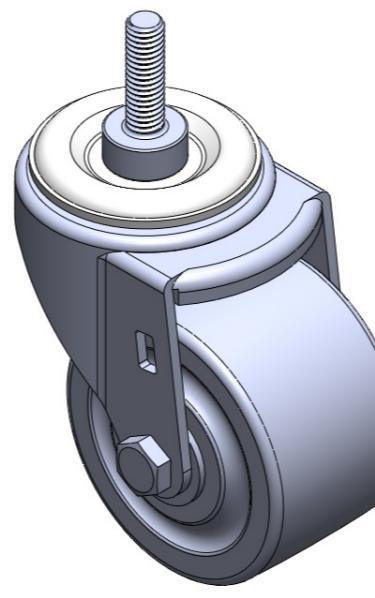

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	75mm
Wheel Width	45mm
Wheel Bearing	Wheel With Annual Ball Bearing
Threaded Stem	3/8" -16
Threaded Size	32mm
Offset	31mm
Swivel Interference	138mm
Overall Height	108mm
Swivel Radius	69mm
Hardness Of Tread	80±5° Shore D
Load Capacity (Dynamic)	225kgs
Load Capacity (Static)	337.5kgs
Temperature	-20°C to +150°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.72kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

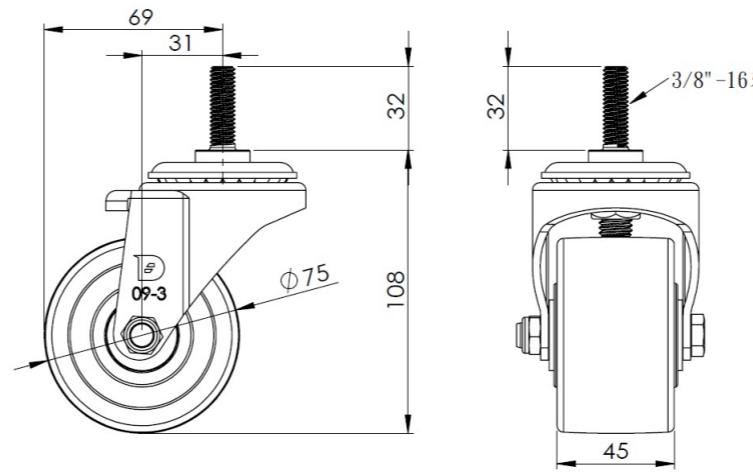

Mounting

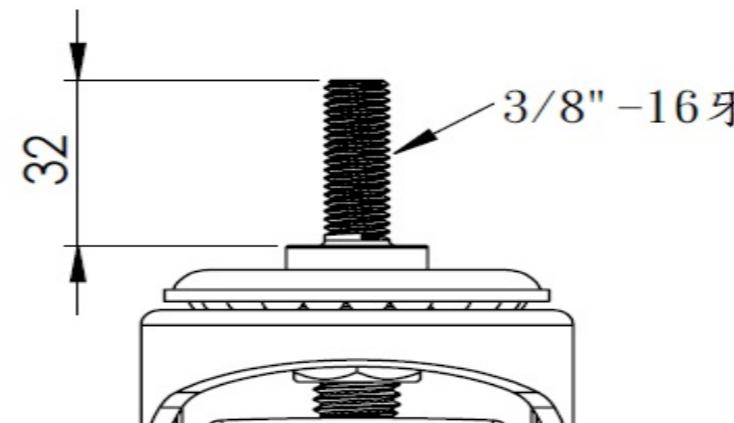

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com