



1112 2" Wide General Purposes Caster Series


PU (red) Wheel Diameter × Wheel Width 101 x 50.6mm

EAN
TW-4111204001020

Rigid castor, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type
Cast Iron Wheel Center, high quality polyurethane wheel tread Iron red, Bearing - Annual
Ball Bearing.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

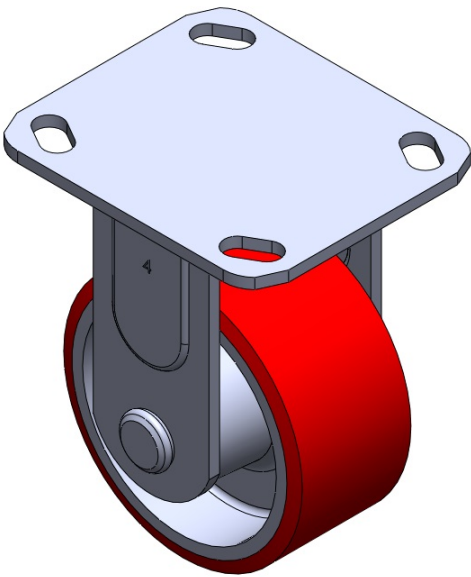

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	101mm
Wheel Width	50.6mm
Wheel Bearing	Wheel With Annual Ball Bearing
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	54mm
Swivel Interference	260mm
Overall Height	142mm
Swivel Radius	60mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	270kgs
Load Capacity (Static)	405kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.0kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

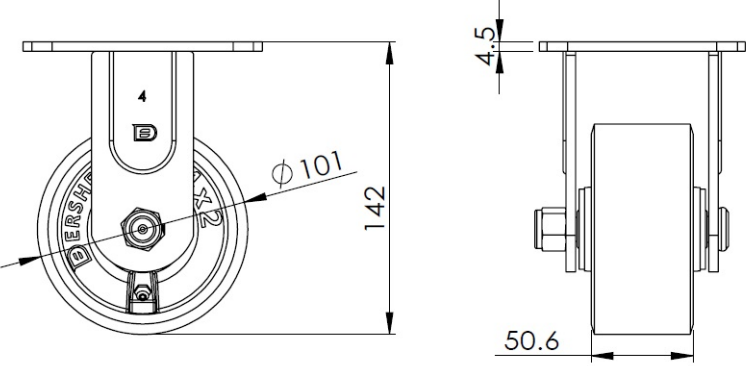

Mounting

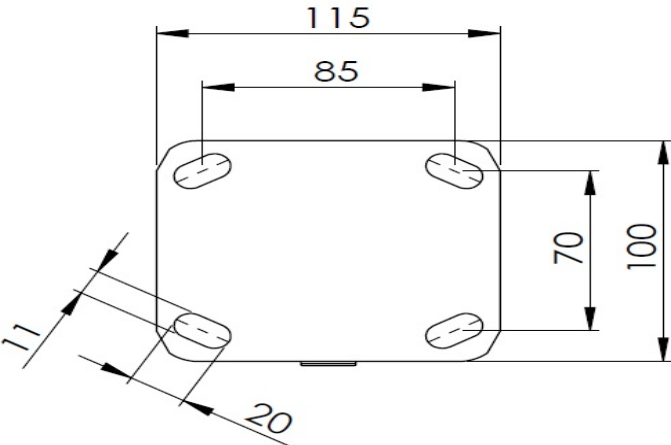

* For any deviation between metric and imperial spec, please refer to the metric spec.