# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Phenolic (black) Wheel Diameter × Wheel Width 101 x 50.8mm

EAN

TW-4111204002019

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate (high-temperature-resistant washers) Phenolic Wheel Black, Bearing—Ball Bearing.

Tread: Compressed synthetic resin impregnated with fabric Wheel Center: Compressed synthetic resin impregnated with fabric

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Metric ○ Imperial

Wheel Diameter 101mm
Wheel Width 50.8mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 25mm Swivel Interference 152mm Overall Height 143mm **Swivel Radius** 76mm Hardness Of Tread 80±5° Shore D

Load Capacity (Dynamic) 360kgs

Load Capacity (Static) 540kgs

Temperature -20°C to +150°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.70kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

#### Dimensions





## Mounting

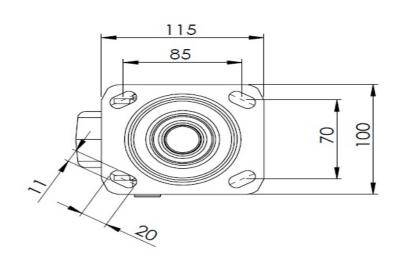

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.