1112 2" Wide General Purposes Caster Series



PU (black) Wheel Diameter × Wheel Width 125 x 40mm

EAN

TW-4111205002058

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate (chrome-plated cover included) Cast Iron Wheel Center with High Quality Polyurethane tread Black, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 4-9/16 " x 4 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Offset
 1-5/16 "

 Swivel Interference
 7-5/8 "

 Overall Height
 6-9/16 "

 Swivel Radius
 3-7/8 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 794lbs

Load Capacity (Static) 1190lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.7lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ \circ

Operating Noise


• • • • 0

Floor Surface Preservation • • • • ○

Dimensions



Mounting

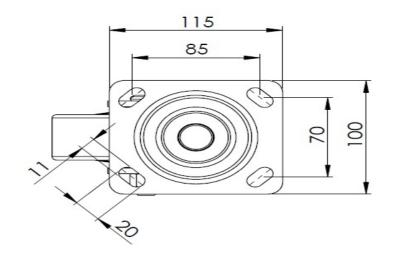

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.