# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Phenolic (black) Wheel Diameter × Wheel Width 125 x 50mm


EAN

TW-4111205004008

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated, Mounting Type - Top Plate. Phenolic Wheels. Black. Bearings—Annual Ball Bearing.

Tread: Compressed synthetic resin impregnated with fabric Wheel Center: Compressed synthetic resin impregnated with fabric

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 38.5mm Swivel Interference 200mm Overall Height 167mm **Swivel Radius** 100mm Hardness Of Tread 80±5° Shore D

Load Capacity (Dynamic) 400kgs
Load Capacity (Static) 600kgs

Temperature -20°C to +150°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.20kgs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

### Dimensions

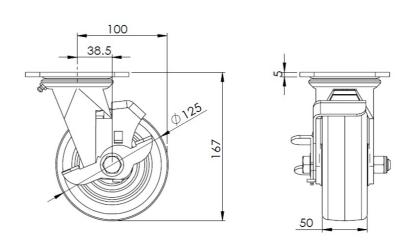

# Mounting

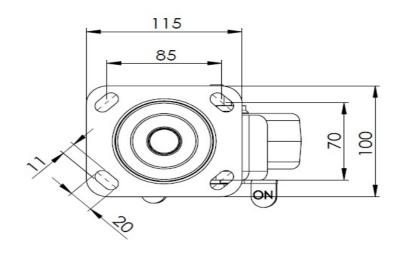

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.