1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU wheel (green) wheel diameter × wheel width 150 x 50.6mm


EAN

TW-4111206001003

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron core with High Quality Polyurethane Wheel Tread Green color, Bearing—Annual Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 50.6mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Overall Height 190mm Hardness Of Tread 93±5° Shore A Load Capacity (Dynamic) 410kgs


Load Capacity (Static) 615kgs Temperature -20°C to +70°C Rigid Caster N/A N/A N/A

Fork Type Stainless **Electrical Conductivity** Anti-Static Weight 2.70kgs Standard ISO22883


Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions

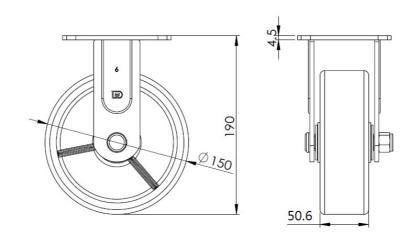

Mounting

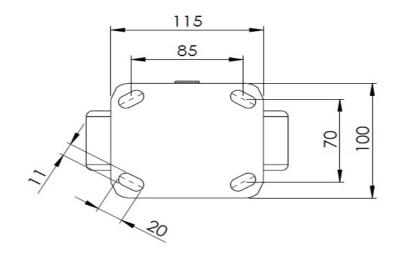

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.