1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm


EAN

TW-4111206001041

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High-Quality Resilient Rubber tread Black, Bearing—Annual Ball Bearing.

Wheel Tread: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Standard

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

ISO22883

Plate Size $115 \times 100 \text{mm}$ Bolt Hole Spacing $85 \times 70 \text{mm}$ Plate Hole $20 \times 11 \text{mm}$ Overall Height190 mmHardness Of Tread $80 \pm 5^{\circ}$ Shore A

Load Capacity (Dynamic) 250kgs
Load Capacity (Static) 375kgs

Temperature -20°C to +120°C

Fork Type Rigid Caster


Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.30kgs

Dimensions




Advantages at a glance


Rolling Resistance

Operating Noise

Floor Surface Preservation • • • • •



Mounting

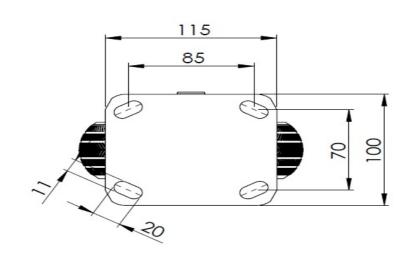

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.