# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm


EAN

TW-4111206001059

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Aluminum core with High Quality Polyurethane tread Brown, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

	Metric	$\bigcirc$	Impo	orial
igcup	Menic	$\cup$	HIID	znai

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Overall Height 190mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 450kgs Load Capacity (Static) 675kgs Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.80kgs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

### Dimensions





## Mounting

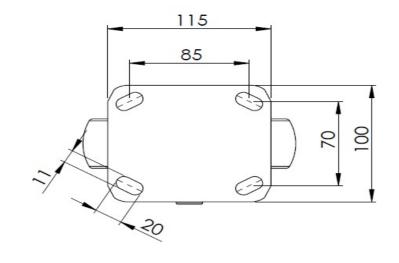

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.