1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 152 x 50mm

EAN

TW-4111206002032

Swivel Caster with Welded Caster Fork E-Coat Finish, Mounting Type - Top Plate Reinforced, impact-resistant High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread Gray color, Bearing—precision long bead

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 152mm
Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 35mm 222mm Swivel Interference Overall Height 190mm **Swivel Radius** 111mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 272kgs

Load Capacity (Static) 408kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.0kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


•

Floor Surface Preservation • • • • •

Dimensions

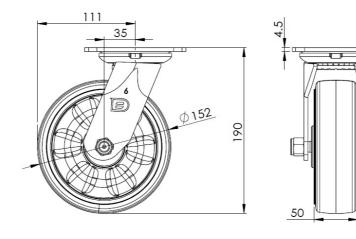

Mounting

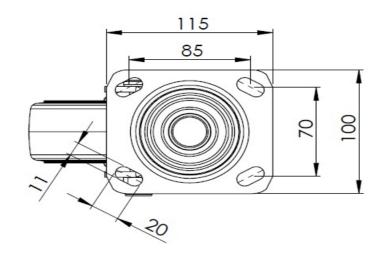

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.