# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm

EAN

TW-4111206002047

Swivel Caster, Riveted steel Fork with 3/4-10 threads Zine-Plated, Mounting Type - Threaded Stem Cast Iron core, High-Quality Resilient Rubber Wheel Tread Black, Bearing—Annual Ball Bearing

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

Imperial O Metric
-------------------

Wheel Diameter 6 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Threaded Stem 3/4"-10牙
Threaded Size 1-5/8"
Offset 1-3/8"
Swivel Interference 8-3/4"
Overall Height 7-5/8"
Swivel Radius 4-3/8"

Hardness Of Tread 80±5° Shore A
Load Capacity (Dynamic) 551lbs
Load Capacity (Static) 827lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Electrical Conductivity

Anti-Static

N/A

Weight

6.2lbs

Standard


ISO22883

### Advantages at a glance


Rolling Resistance

• • • • • • • • • • • • • Floor Surface Preservation

### Dimensions

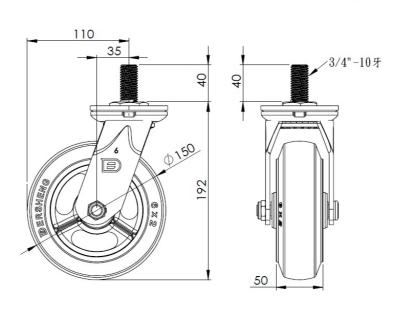

## Mounting

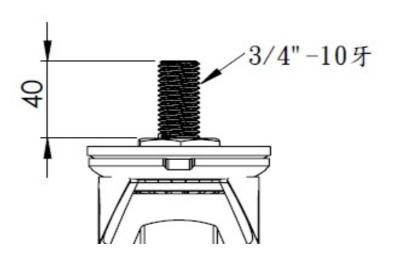

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.