

1112 2" Wide General Purposes Caster Series




WMRC Wheel Diameter × Wheel Width 150 x 40mm

EAN
TW-4111206004044

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate (with plastic cover). Reinforced thermoplastic Wheel Center and Wheel Tread. White. Bearings: Ball Bearings.

Wheel tread: Thermoplastic
Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

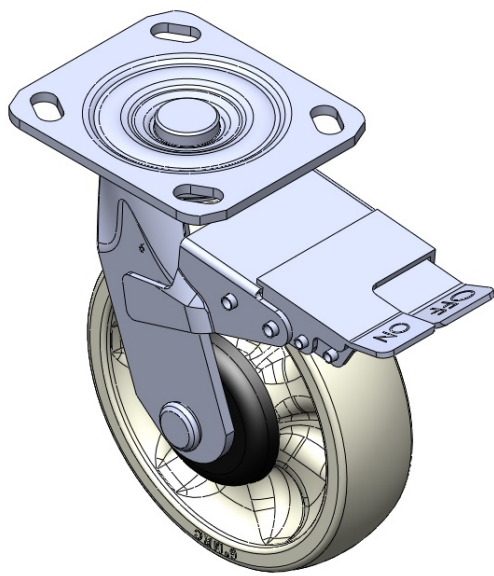

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	35mm
Swivel Interference	290mm
Overall Height	190mm
Swivel Radius	145mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.80kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

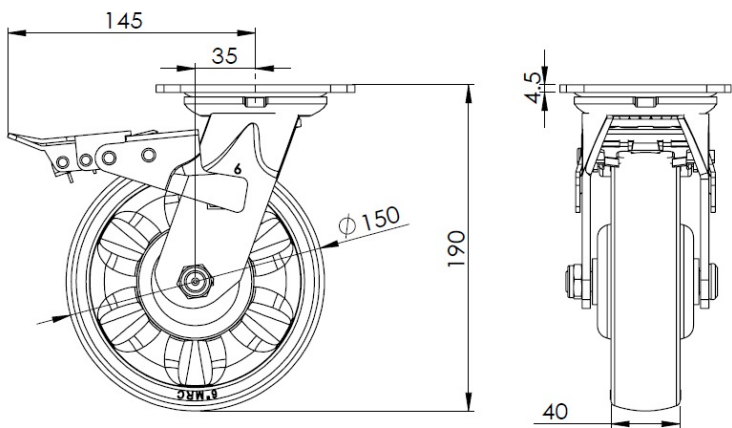

Mounting

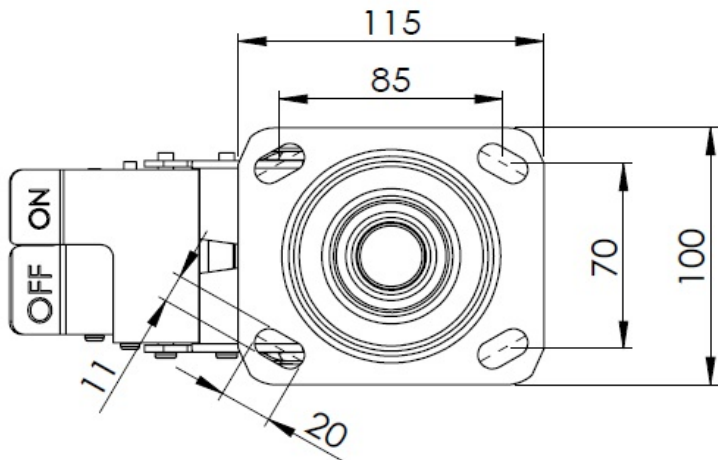

* For any deviation between metric and imperial spec, please refer to the metric spec.