1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 202 x 50mm

EAN

TW-4111208002001

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High-Quality Resilient Rubber tread Black, Bearing—Annual Ball Bearing.

Wheel Tread: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 8 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole 1-13/16 " Offset 11-1/2 " Swivel Interference 7-1/2 " Overall Height 5-13/16 " **Swivel Radius** Hardness Of Tread 80±5° Shore A Load Capacity (Dynamic) 661lbs

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.3lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

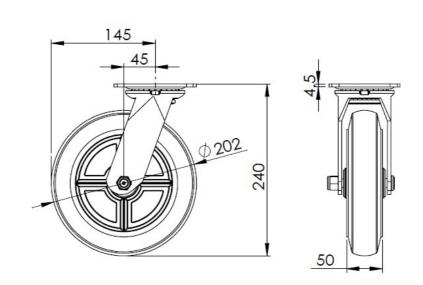

Mounting

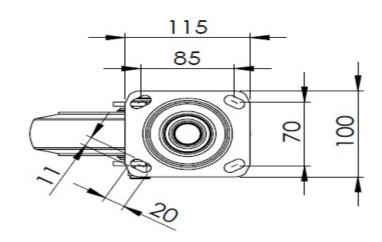

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.