


1112 2" Wide General Purposes Caster Series

W Resolute(gray) Wheel Diameter x Wheel Width 200 x 50mm

EAN

TW-4111208004024

Equipped with side-brake, locking Casters. Welded Caster Fork. Zinc-Plated, Mounting Type - Top Plate. Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) wheel rim. Gray color, Bearing—Annual Ball Bearings.

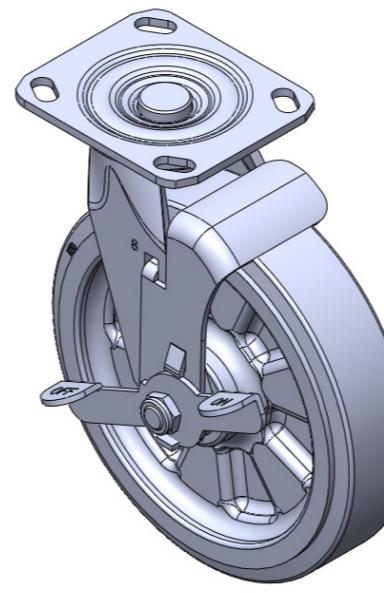

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 8 "

Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 x " 3/8 "

Offset 1-13/16 "

Swivel Interference 11-1/2 "

Overall Height 9-1/2 "

Swivel Radius 5-13/16 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 675lbs

Load Capacity (Static) 1014lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.7lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

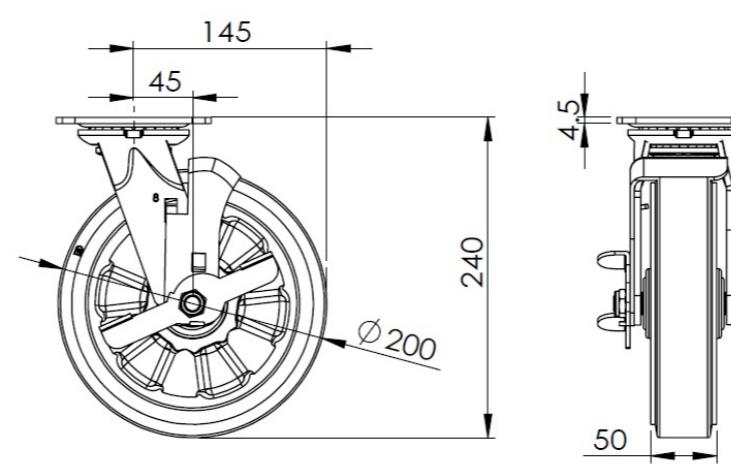

Mounting

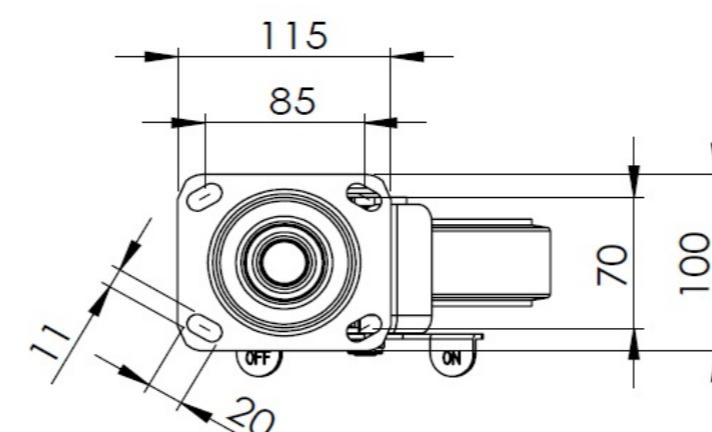

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com