

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Nylon Wheel Diameter x Wheel Width 100 x 32mm

EAN

TW-4111604001027

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforation Surface vibration, Mounting Type - Top Plate device Reinforced Polypropylene and rim White, wheels — Plain Bearing.

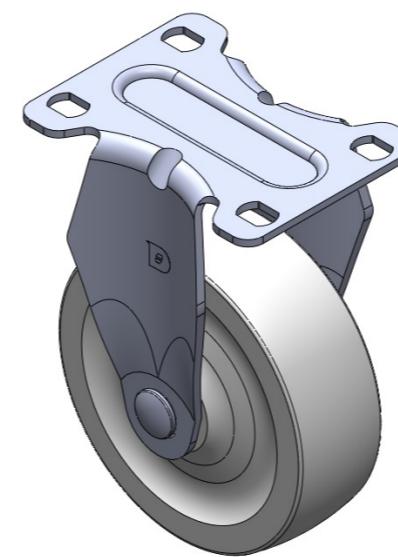

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 100mm

Wheel Width 32mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 92 x 70mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Overall Height 137mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 120kgs

Load Capacity (Static) 180kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

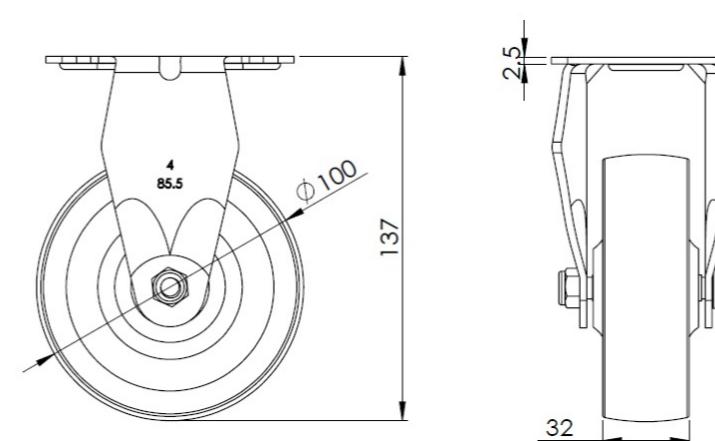

Mounting

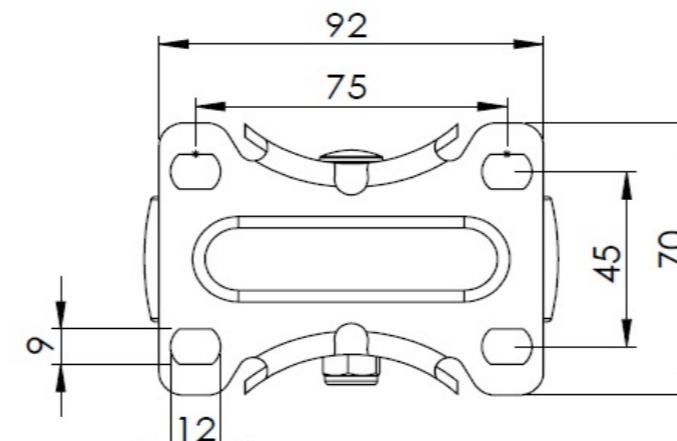

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com