

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Phenolic Wheel Diameter × Wheel Width 100 x 34mm

EAN

TW-4111604002021

Swivel Casters, Riveted and Stamping Fork. Surface vibration, Mounting Type - Top Plate device. Wheel Center and surface made of compressed synthetic resin impregnated with softened fabric. Black, Plain Bearings.

Wheel surface: Compressed synthetic resin impregnated with softened fabric
 Wheel Center: Compressed synthetic resin impregnated with softened fabric

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	4 "
Wheel Width	1-3/8 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-5/8 " x 2-13/16 "
Bolt Hole Spacing	2-7/8 " x 2-1/8 "
Plate Hole	3/8 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-1/2 "
Swivel Radius	3-5/8 "
Hardness Of Tread	80±5° Shore D
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	445lbs
Temperature	-4°F to +302°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

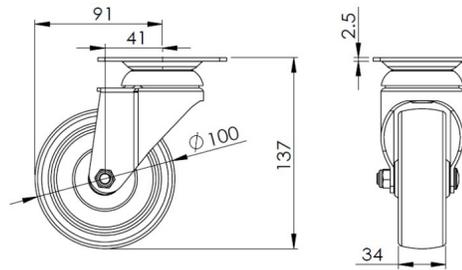

Mounting

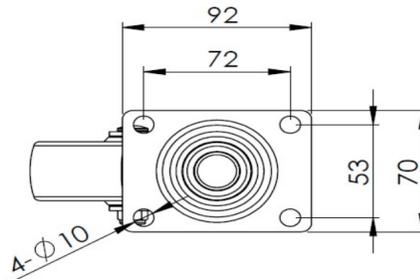

* For any deviation between metric and imperial spec, please refer to the metric spec.