

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



W Nylon wheel (white) Wheel diameter x wheel width 100 x 31mm

EAN


TW-4111604002035

Swivel Casters, Single Bolthole Stamping Fork—hollow Ø10.2 hole Surface vibration, interlocking Mounting Type device Reinforced thermoplastic Wheel Center and Wheel Tread White, Bearing—Ball Bearings.

Wheel surface: thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

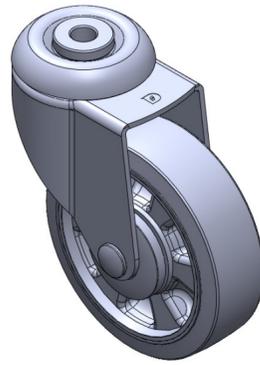

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Single Bolt HoleCentre Hole	3/8 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-3/16 "
Swivel Radius	3-5/8 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	446lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.3lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

## Dimensions

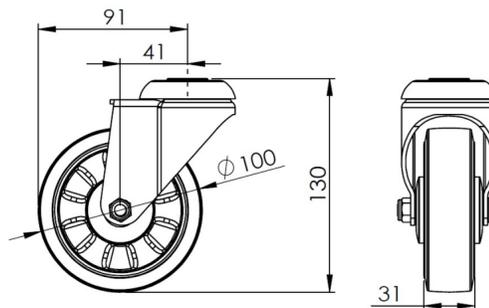

## Mounting

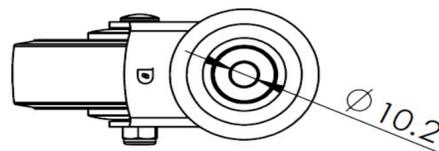

\* For any deviation between metric and imperial spec, please refer to the metric spec.