

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




W Nylon wheel (white) Wheel diameter x wheel width 100 x 31mm

EAN  
TW-4111604002043

Swivel Casters, Riveted and Stamping Top Plate—M12-P1.75 Surface vibration, Mounting Type - Top Plate device Reinforced thermoplastic Wheel Center and Wheel Tread White, Bearing—Ball Bearings.

Wheel surface: thermoplastic  
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

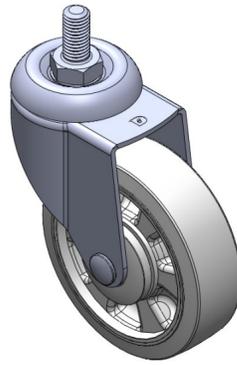

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M12-P1.75
Threaded Length	1 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-5/16 "
Swivel Radius	3-5/8 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	445lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.4lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

## Dimensions

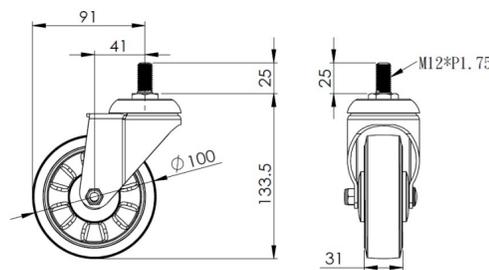

## Mounting

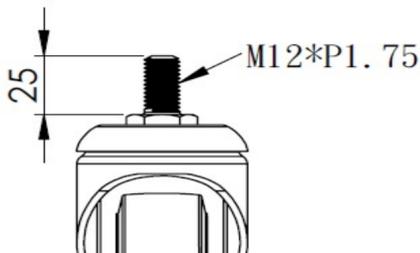

\* For any deviation between metric and imperial spec, please refer to the metric spec.