

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



PU Wheel Diameter × Wheel Width 100 x 34mm

EAN

TW-4111604002070

Portable Casters, Threaded Stem Stamping Fork—1/2"-12 teeth; surface vibration damping, Mounting Type - Threaded Stem; cast iron Wheel Center, High Quality Polyurethane Wheel Tread; red color, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Iron core/Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2" -12
Threaded Length	28mm
Offset	41mm
Swivel Interference	182mm
Overall Height	133.5mm
Swivel Radius	91mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	135kgs
Load Capacity (Static)	202.5kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.30kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

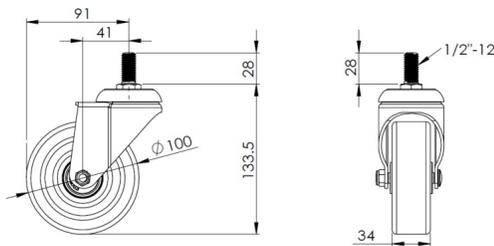

## Mounting

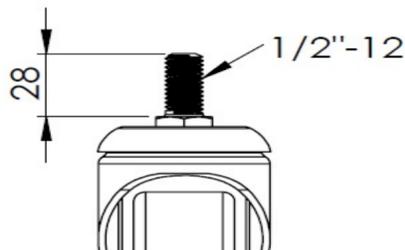

\* For any deviation between metric and imperial spec, please refer to the metric spec.