

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




W Nylon wheel (white) Wheel diameter × wheel width 125 x 31mm

EAN

TW-4111605002052

Swivel Casters, slit-type Riveted Stamping Fork—Ø21.5x56L with retaining rings
 Surface vibration, slit-type Mounting Type device (no logo) Reinforced thermoplastic
 Wheel Center and Wheel Tread White, Bearing—Ball Bearings

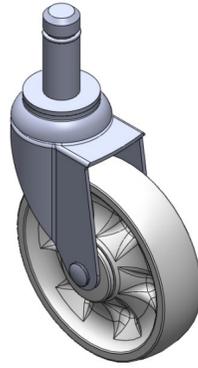

Wheel surface: thermoplastic
 Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	5 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Stem Diameter	7/8 "
Stem Length	2-1/4 "
Offset	1-9/16 "
Swivel Interference	8 "
Overall Height	6-1/2 "
Swivel Radius	4 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

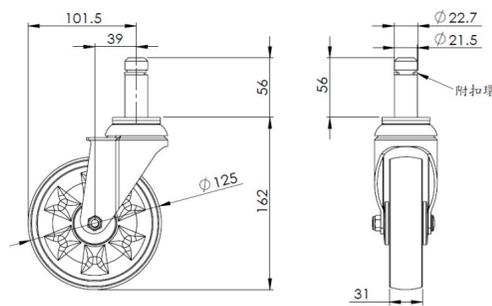

Mounting

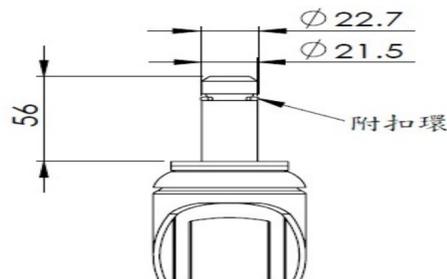

* For any deviation between metric and imperial spec, please refer to the metric spec.