1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (red) Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903001006

Rigid Caster with Stamping Fabricated Caster Fork and angled hole.

Zine-Plated, Mounting Type - Top Plate.


High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Red color. Bearing: Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

3-11/16 " x 2-13/16 "

Bolt Hole Spacing 3 " x 2 "

Plate Hole 5/8 " x 25/64 "

Overall Height 4-1/2 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.9lbs
Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ

Operating Noise


 $\bullet \bullet \bullet \circ$

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

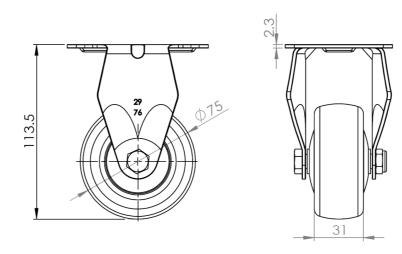

Mounting

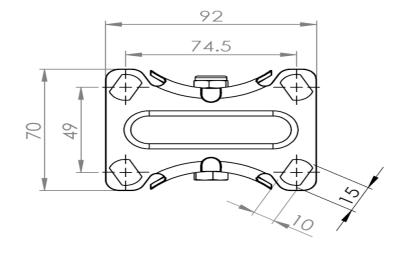

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.