



1129 Medical Caster Series


Rubber Wheel Diameter × Wheel Width 75 x 31mm

EAN
TW-4112903002042

Swivel Caster with Riveted Fork and Stamping bracket with angled holes.
Zine-Plated, Mounting Type - Top Plate.
Cast Iron core with High-Quality Resilient Rubber Wheel Tread.
Bearing - Plain Bearing.

Wheel surface: high-quality elastic rubber
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

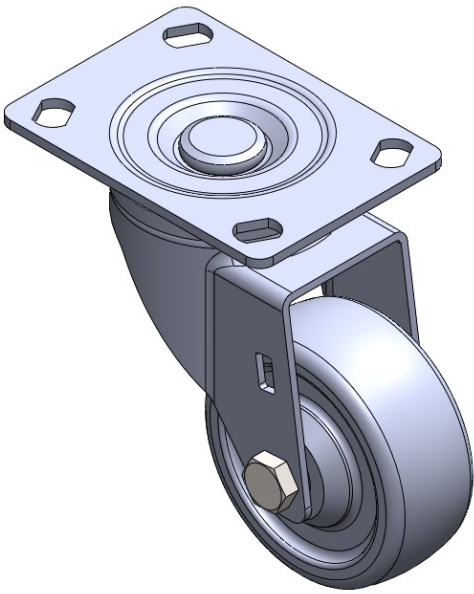

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	96 x 69mm
Bolt Hole Spacing	74.5 x 49mm
Plate Hole	13 x 9mm
Offset	42.5mm
Swivel Interference	160mm
Overall Height	114mm
Swivel Radius	80mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.60kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

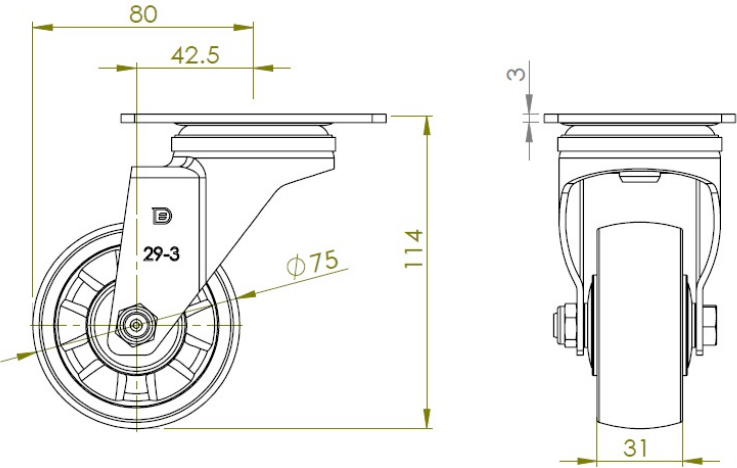

Mounting

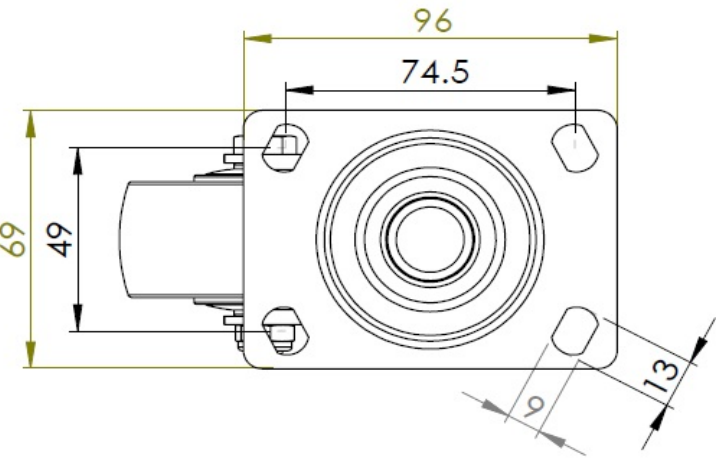

* For any deviation between metric and imperial spec, please refer to the metric spec.