# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 75 x 31mm


EAN

TW-4112903004048

Casters with Total Brakes and With locking system. Riveted Stamping Fork with 3/8-16 threads Zine-Plated, Mounting Type - Threaded Stem Reinforced impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing with Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

### ● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16牙
Threaded Size 32mm
Offset 42.5mm
Swivel Interference 210mm
Overall Height 116mm
Swivel Radius 105mm

Hardness Of Tread 72±5A° Shore A

Load Capacity (Dynamic) 90kgs
Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.60kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

### Dimensions

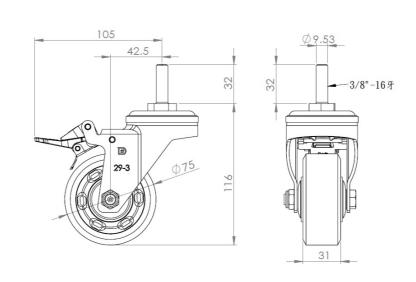

## Mounting

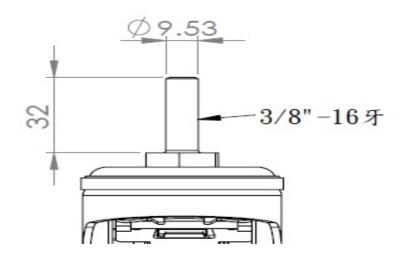

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.