# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

AQPU (grey) wheel Diameter × Wheel Width 100 x 31mm


EAN

TW-4112904001020

Rigid Caster with integrally molded, Stamping footrest and 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate with plastic cover. Aluminum core with High Quality Polyurethane Wheel Tread. Gray color. Bearings: Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

		$\sim$		
	Metric	( )	lmn	erial
•	IVICUIC	$\smile$	шир	CHAI

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 136mm

Hardness Of Tread 77±5° Shore A

Load Conseity (Dynamic)

Load Capacity (Dynamic)200kgsLoad Capacity (Static)300kgsTemperature-20°C to +70°CFork TypeRigid CasterStainlessN/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883

### Advantages at a glance

Rolling Resistance


• • • • •

**Operating Noise** 


• • • •

Floor Surface Preservation • • • • •

#### **Dimensions**

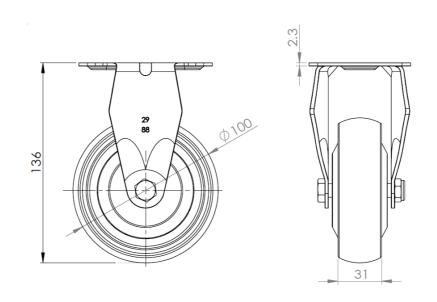

## Mounting

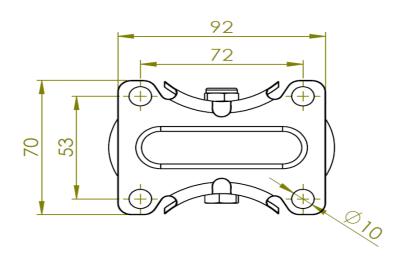

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.