1129 Medical Caster Series

Dersheng Casters Keep Rolling

AQPU (grey) wheel Diameter × Wheel Width 100 x 31mm

EAN


TW-4112904001025

Rigid Caster with integrally molded, Stamping footrest and 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Chrome-Plated finish, Mounting Type - Top Plate with plastic cover. Aluminum core with High Quality Polyurethane Wheel Tread. Gray color. Bearings: Ball Bearings.

Wheel surface: high quality polyurethane

Wheels: Aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 136mm

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Load Capacity (Static)

Temperature

-20°C to +70°C

Fork Type

Rigid Caster

Stainless

N/A

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight0.45kgsStandardISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

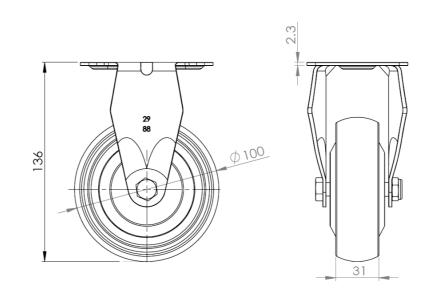

Mounting

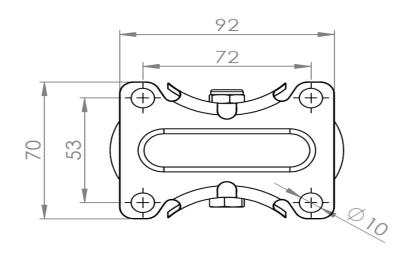

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.