1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 100 x 31mm

EAN


TW-4112904002017

Swivel Caster, Riveted Stamping Fork - 5/8-11 threads
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Dark gray, Bearing - Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 5/8"-11牙
Threaded Size 32mm
Offset 40mm
Swivel Interference 180mm
Overall Height 141mm
Swivel Radius 90mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.55kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

 \bullet \bullet \circ


Operating Noise

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

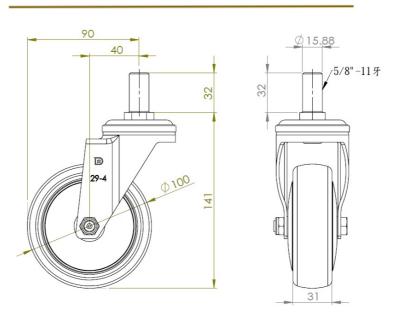

Mounting

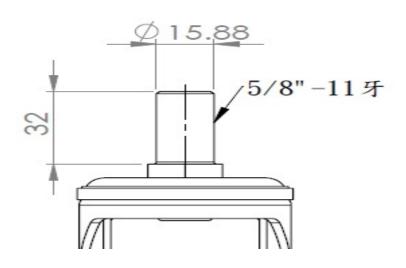

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.