1129 Medical Caster Series

PPR Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904002026

Swivel Caster with Riveted Fork and Stamping Fork - round hole Zine-Plated, Top Plate (4T) Mounting Type system High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheels With Ball Bearings Wheel Bearing

Plate Size 110 x 93mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 10mm Offset 40mm Swivel Interference 180mm Overall Height 139mm **Swivel Radius** 90mm Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs 120kgs Load Capacity (Static)


Temperature -20°C to +60°C Fork Type **Swivel Caster**


Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 0.85kgs Standard ISO22883

Advantages at a glance


Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions





Mounting

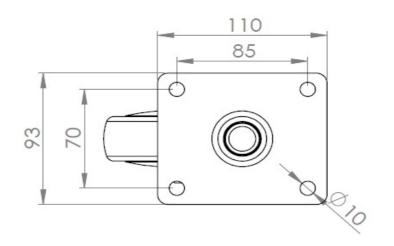

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.