1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904002028

Swivel Caster with Riveted Fork and Stamping Fork - round hole Zine-Plated, Top Plateed (4T) Mounting Type system Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Ball Bearings.

72±5° Shore A

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/8 " x 3-11/16 "

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Bolt Hole Spacing 3-7/16 " x 2-7

Plate Hole 3/8 "

Plate Hole 3/8 "

Offset 1-5/8 "

Swivel Interference 7-1/8 "

Overall Height 5-1/2 "

Swivel Radius 3-9/16 "

Load Capacity (Dynamic) 265lbs

Load Capacity (Static) 413lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.9lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

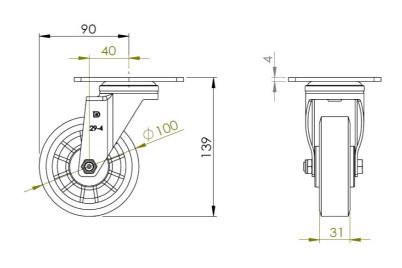

Mounting

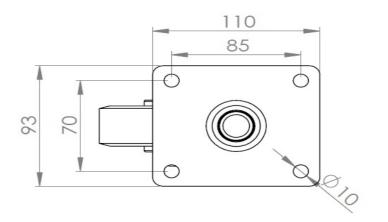

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.