# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904002046

Swivel Caster with Riveted Fork and Stamping bracket – angled hole Zine-Plated, Top Plate (3T) Mounting Type High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 69mm **Bolt Hole Spacing** 74.5 x 49mm Plate Hole 13 x 9mm Offset 40mm Swivel Interference 180mm Overall Height 139mm **Swivel Radius** 90mm Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs
Load Capacity (Static) 120kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### Dimensions

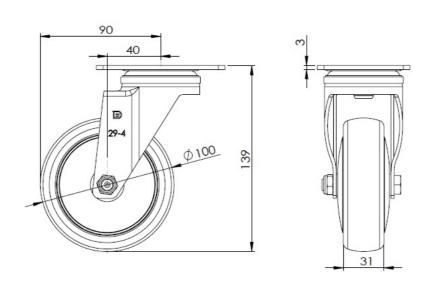

## Mounting

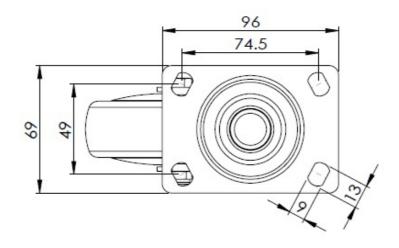

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.