1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904002047

Swivel Caster with Riveted Fork and Stamping bracket – angled hole Zine-Plated, Top Plate (3T) Mounting Type High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 69mm **Bolt Hole Spacing** 74.5 x 49mm Plate Hole 13 x 9mm Offset 40mm Swivel Interference 180mm Overall Height 139mm **Swivel Radius** 90mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic)125kgsLoad Capacity (Static)187.5kgsTemperature-20°C to +60°CFork TypeSwivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

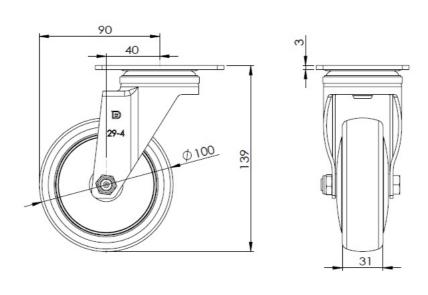

Mounting

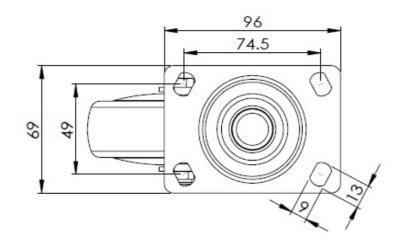

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.